

# SQUARE BEAM RGB+W

## Exterior Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**RGB+White:** LED lamping options (RGB30, RGB35, & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.

**RGB:** LED lamping option features RGB color changing. DMX controller supplied by others.

**Static Color:** LED options (Red, Green, or Blue) feature static color.

**LED:** High efficiency mid-power LEDs are field serviceable.

**LED Dimming:** Standard 0-10V dimming when static color specified.

**LED Driver:** Driver remotely mounted up to 10' from fixture body.

**Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

**Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.


**Standard Finishes:** Highly durable oven cured no VOC premium powder coat.

**Design:** Aluminum die cast end caps and decorative bars.

**Modified:** Contact factory for modified lengths, lamping and decorative fronts.

**Exterior Mounting:** Gasketed between wall and wall plate.

**Listing:** Fixture ETL listed for wet locations.

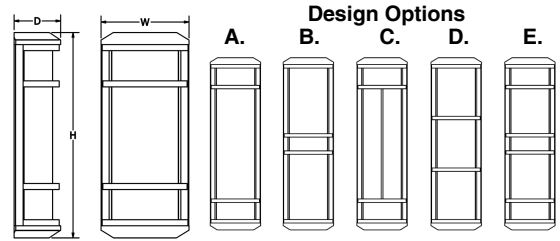

SAMPLE CATALOG NUMBER:						
GL-5471-		MM-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)	
<b>GL-5470</b> W 7 1/4" in H 17" in 5lbs 2.3kg D 3 7/8" in	<b>Y.</b> RED <b>Z.</b> GREEN <b>AA.</b> BLUE <b>BB.</b> RGB <b>CC.</b> 14RGB30 <b>DD.</b> 14RGB35 <b>EE.</b> 14RGB40	<b>Standard:</b> <b>S.</b> Satin White  Polycarbonate is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue	<b>Standard:</b> <b>A.</b> <b>Optional:</b> <b>B.</b> <b>C.</b> <b>D.</b> <b>E.</b> Not available with GL-5470	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
<b>GL-5471</b> W 7 1/4" in H 25" in 7lbs 3.2kg D 3 7/8" in	<b>FF.</b> RED <b>GG.</b> GREEN <b>HH.</b> BLUE <b>II.</b> RGB <b>JJ.</b> 14RGB30 <b>KK.</b> 14RGB35 <b>LL.</b> 14RGB40 <b>MM.</b> 28RGB30 <b>NN.</b> 28RGB35 <b>OO.</b> 28RGB40					
<b>GL-5472</b> W 7 1/4" in H 37" in 10lbs 4.5kg D 3 7/8" in	<b>PP.</b> RED <b>QQ.</b> GREEN <b>RR.</b> BLUE <b>SS.</b> RGB <b>TT.</b> 21RGB30 <b>UU.</b> 21RGB35 <b>VV.</b> 21RGB40 <b>WW.</b> 42RGB30 <b>XX.</b> 42RGB35 <b>YY.</b> 42RGB40					
<b>GL-5473</b> W 7 1/4" in H 49" in 14lbs 6.3kg D 3 7/8" in	<b>ZZ.</b> RED <b>AB.</b> GREEN <b>AC.</b> BLUE <b>AD.</b> RGB <b>AE.</b> 28RGB30 <b>AF.</b> 28RGB35 <b>AG.</b> 28RGB40 <b>AH.</b> 56RGB30 <b>AI.</b> 56RGB35 <b>AJ.</b> 56RGB40		<b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone			

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14W	+80	50000	781	3000	28RGB30	28W	+80	50000	1562	3000
14RGB35	14W	+80	50000	781	3500	28RGB35	28W	+80	50000	1562	3500
14RGB40	14W	+80	50000	781	4000	28RGB40	28W	+80	50000	1562	4000
21RGB30	21W	+80	50000	1171	3000	42RGB30	42W	+80	50000	2527	3000
21RGB35	21W	+80	50000	1171	3500	42RGB35	42W	+80	50000	2527	3500
21RGB40	21W	+80	50000	1171	4000	42RGB40	42W	+80	50000	2527	4000
						56RGB30	56W	+80	50000	3124	3000
						56RGB35	56W	+80	50000	3124	3500
						56RGB40	56W	+80	50000	3124	4000

Universal Voltage unless otherwise specified.

