

# SQUARE BEAM with LED SPOT

Exterior Sconce

9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

## GENERAL SPECIFICATION

**LED Up/Down Light:** Non-dimming 3.6W 225 lumen LED spot.

**LED Reflector:** 40° and 60° reflectors available.

**LED:** High efficiency +90CRI mid-power LEDs are field serviceable.

**LED Dimming:** 0-10V dimming standard.

**Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

**Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.


**Standard Finishes:** Highly durable oven cured no VOC premium powder coat.

**Design:** Aluminum die cast end caps and decorative bars.

**Modified:** Contact factory for modified lengths, lamping and decorative fronts.

**Exterior Mounting:** Gasketed between wall and wall plate.

**Listing:** Fixture ETL listed for wet locations.

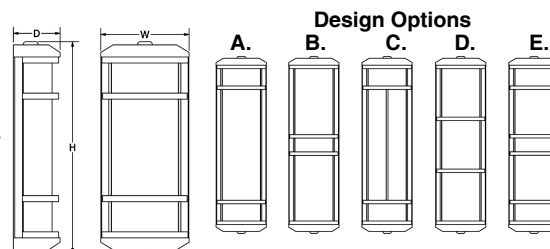

SAMPLE CATALOG NUMBER:						
GL-5481-	G-	C-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)
<b>GL-5480</b> W 7 1/4" in H 17 1/2" in 5lbs D 3 7/8" in 2.3kg	<b>A.</b> 13LED30 <b>C.</b> 13LED40	<b>A.</b> 40° Uplight & No Downlight <b>B.</b> 60° Uplight & No Downlight <b>C.</b> 40° Downlight & No Uplight	<b>Standard:</b> <b>S.</b> Satin White  Polycarbonate is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>Standard:</b> <b>A.</b>  <b>Optional:</b> <b>B.</b> <b>C.</b> <b>D.</b> <b>E.</b> Not available with GL-5480	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
<b>GL-5481</b> W 7 1/4" in H 27 1/2" in 7lbs D 3 7/8" in 3.2kg	<b>D.</b> 13LED30 <b>F.</b> 13LED40 <b>G.</b> 26LED30 <b>I.</b> 26LED40	<b>D.</b> 60° Downlight & No Uplight <b>E.</b> 40° Up & Down <b>F.</b> 60° Up & Down <b>G.</b> 40° Up 60° Down <b>H.</b> 60° Up 40° Down				
<b>GL-5482</b> W 7 1/4" in H 39 1/2" in 10lbs D 3 7/8" in 4.5kg	<b>K.</b> 20LED30 <b>M.</b> 20LED40 <b>N.</b> 39LED30 <b>P.</b> 39LED40					
<b>GL-5483</b> W 7 1/4" in H 51 1/2" in 14lbs D 3 7/8" in 6.3kg	<b>R.</b> 26LED30 <b>T.</b> 26LED40 <b>U.</b> 52LED30 <b>W.</b> 52LED40					

All dimensions are nominal.

## Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Spot LED	Reflector	CRI	Lumens	Kelvin
13LED30	13W	+90	50000	1333	3000	3.6W	40°	80	225	3000 & 4000
13LED40	13W	+90	50000	1333	4000	3.6W	60°	80	225	3000 & 4000
20LED30	20W	+90	50000	2095	3000					
20LED40	20W	+90	50000	2095	4000					
26LED30	26W	+90	50000	2690	3000					
26LED40	26W	+90	50000	2690	4000					
39LED30	39W	+90	50000	4191	3000					
39LED40	39W	+90	50000	4191	4000					
52LED30	52W	+90	50000	5764	3000					
52LED40	52W	+90	50000	5764	4000					

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.