

SQUARE BEAM

Exterior Sconce




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency +90CRI mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard.
- Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
- Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Design:** Aluminum die cast end caps and decorative bars.
- Modified:** Contact factory for modified lengths, lamping and decorative fronts.
- Exterior Mounting:** Gasketed between wall and wall plate.
- Listing:** Fixture ETL listed for wet locations.

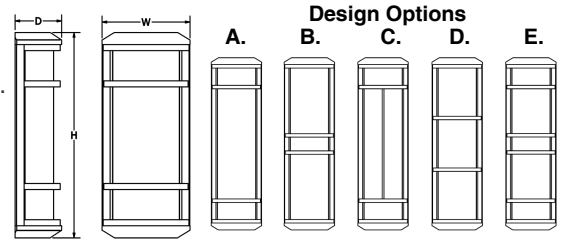

SAMPLE CATALOG NUMBER:					
GL-5471-	H-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-5469 W 7 1/4" in H 12" in D 3 7/8" in 3lbs 1.8kg	AK. 9LED30 AL. 9LED35 AM. 9LED40	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	Standard: A. Optional: B. C. D. E.* *D&E not available with GL-5469. *E not available with GL-5470.	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32"-131°F. LED only. Specify 120 or 277 voltage.
GL-5470 W 7 1/4" in H 17" in D 3 7/8" in 5lbs 2.3kg	A. 13LED30 B. 13LED35 C. 13LED40				
GL-5471 W 7 1/4" in H 25" in D 3 7/8" in 7lbs 3.2kg	D. 13LED30 E. 13LED35 F. 13LED40 G. 26LED30 H. 26LED35 I. 26LED40				
GL-5472 W 7 1/4" in H 37" in D 3 7/8" in 10lbs 4.5kg	K. 20LED30 L. 20LED35 M. 20LED40 N. 39LED30 O. 39LED35 P. 39LED40				
GL-5473 W 7 1/4" in H 49" in D 3 7/8" in 14lbs 6.3kg	R. 26LED30 S. 26LED35 T. 26LED40 U. 52LED30 V. 52LED35 W. 52LED40				

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
9LED30	9W	+90	50000	687	3000	26LED30	26W	+90	50000	2690	3000
9LED35	9W	+90	50000	687	3500	26LED35	26W	+90	50000	2690	3500
9LED40	9W	+90	50000	687	4000	26LED40	26W	+90	50000	2690	4000
13LED30	13W	+90	50000	1333	3000	39LED30	39W	+90	50000	4197	3000
13LED35	13W	+90	50000	1333	3500	39LED35	39W	+90	50000	4194	3500
13LED40	13W	+90	50000	1333	4000	39LED40	39W	+90	50000	4191	4000
20LED30	20W	+90	50000	2087	3000	52LED30	52W	+90	50000	5764	3000
20LED35	20W	+90	50000	2087	3500	52LED35	52W	+90	50000	5764	3500
20LED40	20W	+90	50000	2087	4000	52LED40	52W	+90	50000	5764	4000

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

