

SQUARE BEAM with LED SPOT



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

ADA Interior Sconce

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED Up/Down Light: Non-dimming 3.6W 225 lumen LED spot.

LED Reflector: 40° and 60° reflectors available.

LED: High efficiency +90CRI mid-power LEDs are field serviceable.

LED Dimming: 0-10V dimming standard.


Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lampping and decorative fronts.

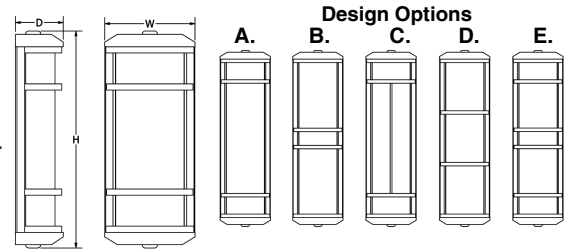

SAMPLE CATALOG NUMBER:						
GL-4481-	G-	C-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-4480 W in 7 1/4" H in 17 1/2" 5lbs D in 3 7/8" 2.3kg	A. 13LED30 C. 13LED40	A. 40° Uplight & No Downlight B. 60° Uplight & No Downlight C. 40° Downlight & No Uplight	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	Standard: A. Optional: B. C. D. E. Not available with GL-4480	A. No Options EL. Emergency LED Remote mount up to 10' from lampping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-4481 W in 7 1/4" H in 27 1/2" 7lbs D in 3 7/8" 3.2kg	D. 13LED30 F. 13LED40 G. 26LED30 I. 26LED40	D. 60° Downlight & No Uplight E. 40° Up & Down F. 60° Up & Down G. 40° Up 60° Down H. 60° Up 40° Down				
GL-4482 W in 7 1/4" H in 39 1/2" 10lbs D in 3 7/8" 4.5kg	K. 20LED30 M. 20LED40 N. 39LED30 P. 39LED40					
GL-4483 W in 7 1/4" H in 51 1/2" 14lbs D in 3 7/8" 6.3kg	R. 26LED30 T. 26LED40 U. 52LED30 W. 52LED40					

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Spot LED	Reflector	CRI	Lumens	Kelvin
13LED30	13W	+90	50000	1333	3000	3.6W	40°	80	225	3000 & 4000
13LED40	13W	+90	50000	1333	4000	3.6W	60°	80	225	3000 & 4000
20LED30	20W	+90	50000	2095	3000					
20LED40	20W	+90	50000	2095	4000					
26LED30	26W	+90	50000	2690	3000					
26LED40	26W	+90	50000	2690	4000					
39LED30	39W	+90	50000	4191	3000					
39LED40	39W	+90	50000	4191	4000					
52LED30	52W	+90	50000	5764	3000					
52LED40	52W	+90	50000	5764	4000					

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

