

SQUARE BEAM

ADA Interior Sconce




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

GENERAL SPECIFICATION

- LED:** High efficiency +90CRI mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard.
- Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
- Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Design:** Aluminum die cast end caps and decorative bars.
- Modified:** Contact factory for modified lengths, lamping and decorative fronts.

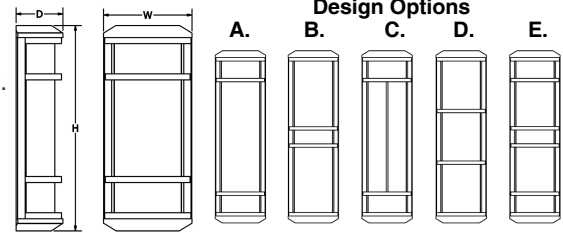

| SAMPLE CATALOG NUMBER: | | | | | |
|--|--|---|---|---|---|
| GL-4471- | H- | S- | PA- | A- | A |
| MODEL NO. | LAMPING | DIFFUSER | FINISH | DESIGN | OPTION(S) |
| GL-4469 W in 7 1/4" mm 185 H in 12" mm 305 3lbs 1.8kg D in 3 7/8" mm 125 | AK. 9LED30 AL. 9LED35 AM. 9LED40 | Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated. | Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone | Standard: A. Optional: B. C. D.* E.* *D&E not available with GL-4469. *E not available with GL-4470. | A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. IEL. Integral Emergency LED Integrally mounted emergency driver. GL-4471 - GL-4473 only. For applications with ambient operating temperatures between 32°-131°F. |
| GL-4470 W in 7 1/4" mm 185 H in 17" mm 430 5lbs 2.3kg D in 3 7/8" mm 125 | A. 13LED30 B. 13LED35 C. 13LED40 | | | | |
| GL-4471 W in 7 1/4" mm 185 H in 25" mm 635 7lbs 3.2kg D in 3 7/8" mm 125 | D. 13LED30 E. 13LED35 F. 13LED40 G. 26LED30 H. 26LED35 I. 26LED40 | | | | |
| GL-4472 W in 7 1/4" mm 185 H in 37" mm 940 10lbs 4.5kg D in 3 7/8" mm 125 | K. 20LED30 L. 20LED35 M. 20LED40 N. 39LED30 O. 39LED35 P. 39LED40 | | | | |
| GL-4473 W in 7 1/4" mm 185 H in 49" mm 1245 14lbs 6.3kg D in 3 7/8" mm 125 | R. 26LED30 S. 26LED35 T. 26LED40 U. 52LED30 V. 52LED35 W. 52LED40 | | | | |

All dimensions are nominal.

Light Source Definition

| Lamp | LED | CRI | Rated Life Hrs | Delivered Lumens | Kelvin | Lamp | LED | CRI | Rated Life Hrs | Delivered Lumens | Kelvin |
|---------|-----|-----|----------------|------------------|--------|---------|-----|-----|----------------|------------------|--------|
| 9LED30 | 9W | +90 | 50000 | 687 | 3000 | 26LED30 | 26W | +90 | 50000 | 2690 | 3000 |
| 9LED35 | 9W | +90 | 50000 | 687 | 3500 | 26LED35 | 26W | +90 | 50000 | 2690 | 3500 |
| 9LED40 | 9W | +90 | 50000 | 687 | 4000 | 26LED40 | 26W | +90 | 50000 | 2690 | 4000 |
| 13LED30 | 13W | +90 | 50000 | 1333 | 3000 | 39LED30 | 39W | +90 | 50000 | 4191 | 3000 |
| 13LED35 | 13W | +90 | 50000 | 1333 | 3500 | 39LED35 | 39W | +90 | 50000 | 4191 | 3500 |
| 13LED40 | 13W | +90 | 50000 | 1333 | 4000 | 39LED40 | 39W | +90 | 50000 | 4191 | 4000 |
| 20LED30 | 20W | +90 | 50000 | 2095 | 3000 | 52LED30 | 52W | +90 | 50000 | 5764 | 3000 |
| 20LED35 | 20W | +90 | 50000 | 2095 | 3500 | 52LED35 | 52W | +90 | 50000 | 5764 | 3500 |
| 20LED40 | 20W | +90 | 50000 | 2095 | 4000 | 52LED40 | 52W | +90 | 50000 | 5764 | 4000 |

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

