

# STOCKPORT

## Interior ADA Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency +90CRI mid-power LEDs are field serviceable.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.



**Body:** Spun .050 aluminum or 18ga steel.

**Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Modifications:** Consult factory for lamping options.

**Surge Protection:** External surge protector provided as standard.

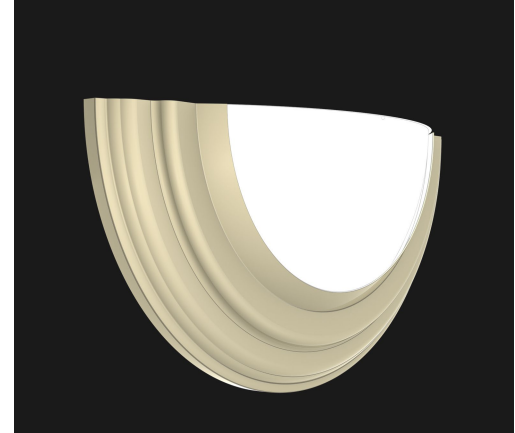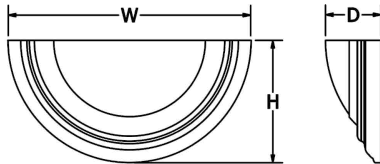

SAMPLE CATALOG NUMBER:					
GL-4090-		L15-	W-	SN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-4090</b>	W in 16" mm 405	<b>L10.</b> 1LED30 <b>L15.</b> 1LED35 <b>L14.</b> 1LED40	<b>Standard:</b> <b>W.</b> White Opal  <b>Optional:</b> <b>S.</b> Satin White  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. <b>L.</b> Perforated Top Lens Painted white perforated metal top lens. <b>TL.</b> Acrylic Top Lens White acrylic top lens.
	5lbs 2.3kg H in 8" mm 205 D in 4" mm 100				
<b>GL-4091</b>	W in 23" mm 790	<b>L10.</b> 1LED30 <b>L15.</b> 1LED35 <b>L14.</b> 1LED40			
	7lbs 3.2kg H in 11 1/2" mm 290 D in 4" mm 100				

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Board Lumens	Kelvin
L10	13	+90	50000	1895	3000
L15	13	+90	50000	1895	3500
L14	13	+90	50000	1895	4000

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.