STONE

Interior Pendant

G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.
Uplight: Optional uplight is wired on a second circuit. Standard satin white top lens.
LED Dimming: Standard 1% 0-10V dimming.
Cable Hanger Option: Standard 150" cable and white cord for on-site adjustability.
Canopy: Matches outer fixture finish. Hanger 3 & 4 with A-O lamping option includes 10.125" dia by 2.625" H spinning. V, W, X lamping includes 12" dia by 2" H.
Driver: Max remote driver installation distance 25ft from fixture body.
Acrylic: Acrylic is UL-94 HB Flame Class rated.
Finish: Highly durable oven cured no VOC premium powder coat.
Inner Finish: Inner finish matches outer finish.
Surge Protection: External surge protector provided as standard.

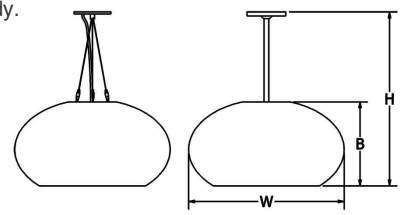

SAMPLE CATALOG NUMBER:

GL-2370-	E-	K-	BLK-	1-	A	038
MODEL NO.	LAMPING	UPLIGHT	FINISH	HANGER	OPTIONS	OVERALL HEIGHT

GL-2370 W 21 in
8lbs B 11 1/4 in
3.6kg H 38 in

LAMPING
A. 1LED30
B. 1LED35
C. 1LED40
D. 1LED30
E. 1LED35
F. 1LED40
G. 1LED30
H. 1LED35
I. 1LED40
V. 1LED30*
W. 1LED35*
X. 1LED40*
***Downlight only.**

UPLIGHT
NA. NONE
J. 1UPLED30
K. 1UPLED35
L. 1UPLED40
M. 1UPLED30
N. 1UPLED35
O. 1UPLED40

FINISH
Standard:
Powder Coat
BLK-Black
BL-Blue
GR-Gray
LG-Light Gray
BE-Beige
PAB-Antique Brass
PA-Painted Aluminum
PTC-Painted Copper
WH-White
DBZ-Dark Bronze
NSN-New Satin Nickel
BRN-Brown
RD-Red
CH-Champagne
RG-Reed Green
SG-Sungold
GM-Gun Metal
POR-Oil Rubbed Bronze
PG-Pine Green
DO-Deep Orange
PV-Purple Violet
NB-Navy Blue
Textured Powder
TLV-Light Verdigris
TWH-Textured White
TBL-Textured Black
TS-Textured Silver
TBZ-Textured Bronze
TST-Stone

HANGER
1. Stem Mount Remote Driver

Drivers mounted remotely
2. Cable Mount Remote Driver

Drivers mounted remotely
3. Stem Mount Oversized Canopy

Drivers mounted inside oversized canopy
4. Cable Mount Oversized Canopy

Drivers mounted inside oversized canopy

OPTIONS
A. No Options
BC. Black Cord
Fixture supplied with black power cord.
DM. DMX Dimming
EL. Emergency LED
Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. Downlight only.
Hanger options 1&2 supplied with remote driver box.

OVERALL HEIGHT
Specify overal height in inches for hanger styles 1 & 3.

All Dimensions are nominal.

Light Source Definition

Downlight Output

Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
A	1LED30	15W	1538	3000	80
B	1LED35	15W	1538	3500	80
C	1LED40	15W	1538	4000	80
D	1LED30	26W	2637	3000	80
E	1LED35	26W	2637	3500	80
F	1LED40	26W	2637	4000	80
G	1LED30	39W	3956	3000	80
H	1LED35	39W	3956	3500	80
I	1LED40	39W	3956	4000	80
V	1LED30	68W	6009*	3000	80
W	1LED35	68W	6009*	3500	80
X	1LED40	68W	6009*	4000	80

*Projected

Uplight Output

Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
J	1UPLED30	8W	866	3000	80
K	1UPLED35	8W	866	3500	80
L	1UPLED40	8W	866	4000	80
M	1UPLED30	12W	1213	3000	80
N	1UPLED35	12W	1213	3500	80
O	1UPLED40	12W	1213	4000	80

Universal Voltage unless otherwise specified.
Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.

© Gross Chandelier Co.
G Lighting reserves the right to modify existing designs to improve appearance or function
G Lighting products are union made.