

# TAHOE II

## Interior Square Semi-Surface Mount





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION


- LED:** High efficiency mid-power LEDs are field serviceable.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Shade:** Standard white fabric shade with integral satin white diffuser. Custom shapes, sizes, and colors available.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for lamping or cluster options.
- Surge Protection:** External surge protector provided as standard.

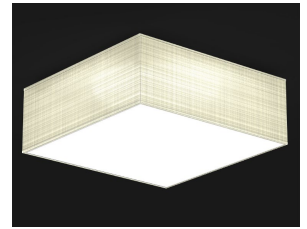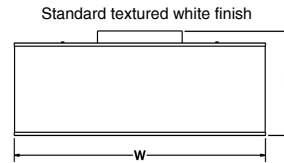

SAMPLE CATALOG NUMBER: GL-3732-			L55-			W-			A		
MODEL NO.			LAMPING			SHADE			OPTIONS		
<b>GL-3730</b>	W in 14" 5lbs 2.25kg	D in 9.5" mm 355 mm 240	<b>IN3. 3MED</b>	<b>L10. 1LED30</b> <b>L15. 1LED35</b> <b>L14. 1LED40</b>	<b>LL10. 1LED30LO</b> <b>LL15. 1LED35LO</b> <b>LL14. 1LED40LO</b>	<b>W</b> White <b>C</b> Cream <b>BL</b> Blue	<b>A. No Options</b> <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.				
<b>GL-3731</b>	W in 18" 5lbs 2.25kg	D in 9.5" mm 460 mm 265	<b>IN3. 3MED</b>	<b>L10. 1LED30</b> <b>L15. 1LED35</b> <b>L14. 1LED40</b>	<b>LL10. 1LED30LO</b> <b>LL15. 1LED35LO</b> <b>LL14. 1LED40LO</b>	<b>BK</b> Black <b>S</b> Stone <b>R</b> Red					
<b>GL-3732</b>	W in 24" 15lbs 7kg	D in 11.5" mm 610 mm 295	<b>IN3. 3MED</b>	<b>L50. 5LED30</b> <b>L55. 5LED35</b> <b>L54. 5LED40</b>	<b>LL50. 5LED30LO</b> <b>LL55. 5LED35LO</b> <b>LL54. 5LED40LO</b>	Washable: <b>WW</b> White <b>WC</b> Cream					
<b>GL-3733</b>	W in 30" 18lbs 8kg	D in 12.5" mm 760 mm 320	<b>IN3. 3MED</b>	<b>L50. 5LED30</b> <b>L55. 5LED35</b> <b>L54. 5LED40</b>	<b>LL50. 5LED30LO</b> <b>LL55. 5LED35LO</b> <b>LL54. 5LED40LO</b>	<b>WLG</b> Lt Gray <b>WGR</b> Gray <b>WBK</b> Black					
<b>GL-3734</b>	W in 36" 20lbs 9kg	D in 13.5" mm 915 mm 340	<b>IN6. 6MED</b>	<b>L80. 8LED30</b> <b>L85. 8LED35</b> <b>L84. 8LED40</b>	<b>LL80. 8LED30LO</b> <b>LL85. 8LED35LO</b> <b>LL84. 8LED40LO</b>	<b>WR</b> Red <b>WBL</b> Blue					
<b>GL-3735</b>	W in 48" 25lbs 11.5kg	D in 15.5" mm 1220 mm 395	<b>IN6. 6MED</b>	<b>L80. 8LED30</b> <b>L85. 8LED35</b> <b>L84. 8LED40</b>	<b>LL80. 8LED30LO</b> <b>LL85. 8LED35LO</b> <b>LL84. 8LED40LO</b>	Shade options may vary based on availability. Consult Finish Guide at glighting.com for current options.					

All Dimensions are nominal.

### Shade

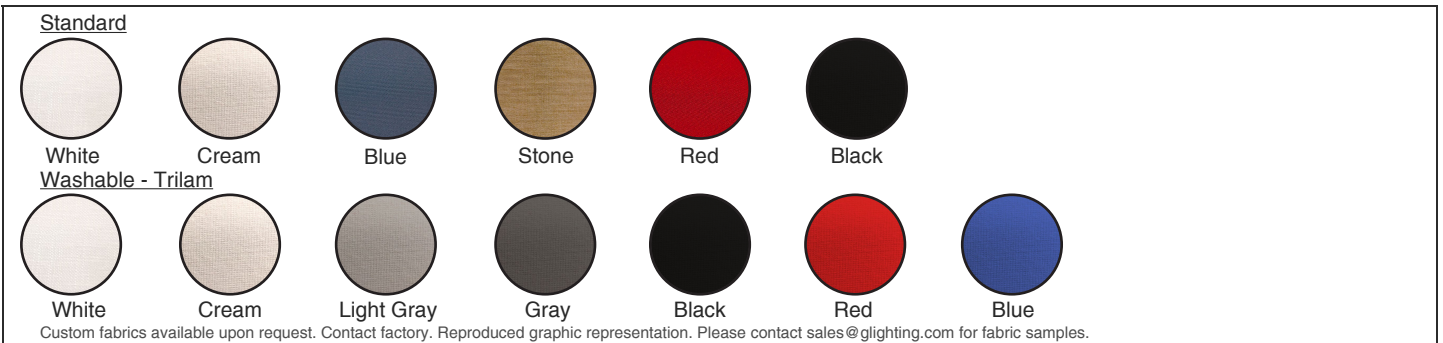

Custom fabrics available upon request. Contact factory. Reproduced graphic representation. Please contact sales@glighting.com for fabric samples.

### Light Source Definition

Code	Lamp	Type	Lamp Base	Code	Lamp	Total Wattage	Delivered Lumens	Kelvin	CRI
IN3,IN6	MED	A-19	Medium 120V	LL50	5LED30LO	39W	4462	3000	+90
		Total	Delivered	LL55	5LED35LO	39W	4462	3500	+90
		Wattage	Lumens	LL54	5LED40LO	39W	4462	4000	+90
LL10	1LED30LO	17 W	1825	L50	5LED30	65W	7436	3000	+90
LL15	1LED35LO	17 W	1825	L55	5LED35	65W	7436	3500	+90
LL14	1LED40LO	17 W	1825	L54	5LED40	65W	7436	4000	+90
L10	1LED30	27 W	3008	LL80	8LED30LO	63W	7126	3000	+90
L15	1LED35	27 W	3008	LL85	8LED35LO	63W	7126	3500	+90
L14	1LED40	27 W	3008	LL84	8LED40LO	63W	7126	4000	+90
				L80	8LED30	105W	12248	3000	+90
				L85	8LED35	105W	12248	3500	+90
				L84	8LED40	105W	12248	4000	+90

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.