

CENTRIC

Interior Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency 90CRI mid-power LEDs. Universal voltage.

Uplight: Optional uplight is wired on a second circuit.

Lower Output: Lamping code ending with LO features lower lumen output.

LED Driver: Must be mounted within 25ft from fixture body.

Finish: Highly durable oven cured no VOC premium powder coat.

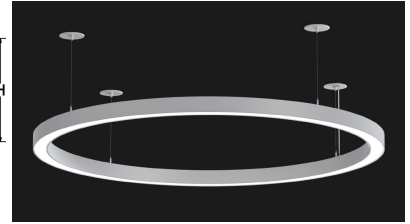
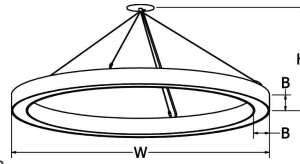
Canopy: Matches fixture finish.





Cable Hanger: Standard 150" cable and white cord for on-site adjustability.

Modifications: Consult factory for modified fixture sizes and lumen packages.

Surge Protection: External surge protector provided as standard.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.



SAMPLE CATALOG NUMBER:					
GL-2307-	B-	B-	BLK-	1- A	
MODEL NO.	LAMPING		FINISH	HANGER	OPTIONS
GL-2305 W in 24" 7lbs B in 3" x 3" 3.2kg H in 11"-145"	Down: A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO	Up: A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO G. NONE	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	1. Cable - Standard  Drivers mounted remotely. See Centric Hanger Guide for more information. 2. Oversized  Drivers mounted inside oversized canopy. See Centric Hanger Guide for more information. 3. Vertical Remote Canopy  Drivers mounted remotely. See Centric Hanger Guide for more information. 4. Vertical Integral Canopy  Drivers mounted inside 12.5" oversized canopy. See Centric Hanger Guide for more information. Hanger options 1&3 supplied with remote driver box.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2306 W in 36" 10lbs B in 3" x 3" 4.5kg H in 18.75"-145"					
GL-2307 W in 48" 14lbs B in 3" x 3" 6.3kg H in 18.75"-145"					
GL-2308 W in 60" 18lbs B in 3" x 3" 8.2kg H in 18.75"-145"					
GL-2309 W in 72" 22lbs B in 3" x 3" 10kg H in 18.75"-145"					
GL-2310 W in 96" 28lbs B in 3" x 3" 12.7kg H in 18.75"-145" Fixture Body Built in Two Segments and Six Acrylic Segments					
GL-2311 W in 120" 36lbs B in 3" x 3" 16.3kg H in 18.75"-145" Fixture Body Built in Two Segments and Six Acrylic Segments					

All Dimensions are nominal.

Light Source Definition

Fixture	Lumen Output					Kelvin	Code	Low Lumen Output					Kelvin
	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Rated Life Hrs			Total Wattage	CRI	Rated Life Hrs	Delivered Lumens		
GL-2305	52	+90	50000	4518	50000	3000/3500/4000	GL-2305	28	+90	50000	2788	50000	3000/3500/4000
GL-2306	72	+90	50000	7003	50000	3000/3500/4000	GL-2306	42	+90	50000	4419	50000	3000/3500/4000
GL-2307	102	+90	50000	9804	50000	3000/3500/4000	GL-2307	59	+90	50000	6120	50000	3000/3500/4000
GL-2308	122	+90	50000	11837	50000	3000/3500/4000	GL-2308	70	+90	50000	7364	50000	3000/3500/4000
GL-2309	145	+90	50000	14051	50000	3000/3500/4000	GL-2309	84	+90	50000	8855	50000	3000/3500/4000
GL-2310	182	+90	50000	17801	50000	3000/3500/4000	GL-2310	105	+90	50000	10075	50000	3000/3500/4000
GL-2311	244	+90	50000	22324	50000	3000/3500/4000	GL-2311	140	+90	50000	14064	50000	3000/3500/4000

Wattage & lumens represent output for one side (up or down).

Universal Voltage unless otherwise specified.