

# GADSDEN RGB+W

## Outdoor Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**RGB+White:** LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

**RGB:** LED option features RGB color changing light source. RGB channel wired DMX ready.

**Static Color:** LED options (Red, Green, or Blue) feature static color.


**Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**DMX:** Controls by others.

**Surge Protection:** External surge protector provided as standard.

**Listing:** Fixture ETL listed for wet locations.

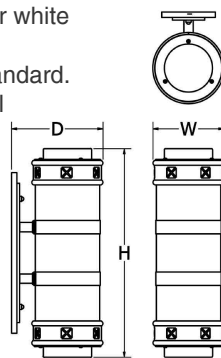

SAMPLE CATALOG NUMBER:				
GL-5300-	H-	S-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-5300</b> W in 6 5/8" mm 170 H in 20" mm 510 D in 8 1/2" mm 215	<b>D.</b> RED <b>E.</b> GREEN <b>F.</b> BLUE <b>G.</b> RGB* <b>H.</b> 14RGB30* <b>I.</b> 14RGB35* <b>J.</b> 14RGB40* <b>K.</b> 28RGB30* <b>L.</b> 28RGB35* <b>M.</b> 28RGB40*	<b>Standard:</b> <b>S.</b> Satin White  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All dimensions are nominal.  
\*DMX controls supplied by others.

### Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14	+80	50000	1017	3000
14RGB35	14	+80	50000	1017	3500
14RGB40	14	+80	50000	1017	4000
28RGB30	28	+80	50000	1992	3000
28RGB35	28	+80	50000	1992	3500
28RGB40	28	+80	50000	1992	4000

Universal Voltage unless otherwise specified.

