

# GADSDEN TUNABLE WHITE

## Outdoor Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**Tunable White:** LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

**LED Tuning:** CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.


**LED Dimming:** Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.

**Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.

**Listing:** Fixture ETL listed for wet locations.

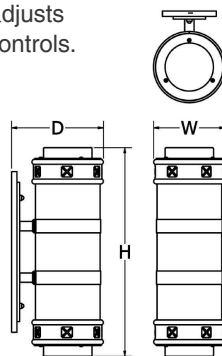

SAMPLE CATALOG NUMBER: GL-5300-					
MODEL NO.		TW1-	S-	NSN-	A
LAMPING		ACRYLIC	FINISH	OPTION(S)	
<b>GL-5300</b> W in 6 5/8" mm 170 H in 20" mm 510 D in 8 1/2" mm 215		<b>TW1</b>  <b>TW2</b>	<b>Standard:</b> <b>S. Satin White</b>  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>A. No Options</b> <b>EL. Emergency LED</b> Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
TW1	14W	1017	2700-6500
TW2	28W	1992	2700-6500

Universal Voltage unless otherwise specified.