

GENERAL SPECIFICATION

LED: High efficiency +90CRI mid-power LEDs are field serviceable. Universal voltage.



LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Acrylic: White acrylic with seam is UL-94 HB Flame Class rated.

Cable Hanger: Comes with 72" cable and white cord for on-site adjustability.

Finish: Highly durable oven cured no VOC premium powder coat. Fixture painted textured white.

Surge Protection: External surge protector provided as standard.

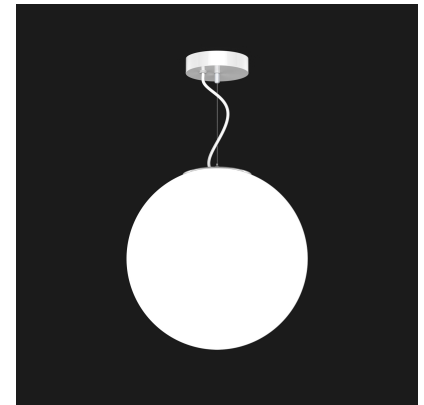

SAMPLE CATALOG NUMBER: GL-2801-		F-	1-	A
MODEL NO.		LAMPING	HANGER	OPTIONS
GL-2800 W in 18" mm 460 20lbs B in 18" mm 460 9kg H in 24"-84" mm 610-2135 Fixture Painted Textured White	A. 26LED30 B. 26LED35 C. 26LED40	1. Cable 	A. No Options LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord. EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	
GL-2801 W in 24" mm 610 30lbs B in 24" mm 610 13.5kg H in 30"-90" mm 760-2285 Fixture Painted Textured White	E. 39LED30 F. 39LED35 G. 39LED40			
GL-2802 W in 30" mm 760 40lbs B in 30" mm 760 18kg H in 36"-96" mm 915-2440 Fixture Painted Textured White	I. 52LED30 J. 52LED35 K. 52LED40			

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
26LED30	26	+90	50000	2844	3000	52LED30	52	+90	50000	6321	3000
26LED35	26	+90	50000	2844	3500	52LED35	52	+90	50000	6321	3500
26LED40	26	+90	50000	2844	4000	52LED40	52	+90	50000	6321	4000
39LED30	39	+90	50000	4912	3000						
39LED35	39	+90	50000	4912	3500						
39LED40	39	+90	50000	4912	4000						

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.