

# PARAGRAPH

## Interior Schoolhouse Sconce




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 1% 0-10V dimming standard with LED lamping option.
- Body:** 18ga steel or .050 aluminum glass fitter.
- Glass:** White opal diffuser hand blown in the USA.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.

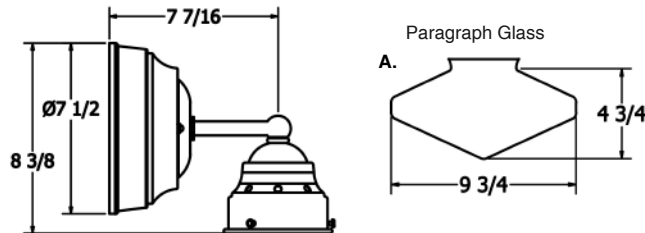

SAMPLE CATALOG NUMBER: GL-4310-				
MODEL NO.	L5-	A-	SN-	A-
MODEL NO.	LAMPING	GLASS	FINISH	OPTION(S)
<b>GL-4310</b>	<b>L0.</b> 11LED30 <b>L5.</b> 11LED35 <b>L4.</b> 11LED40  Driver in backplate	<b>A.</b> Paragraph Glass	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	<b>A.</b> No Options  <b>B.</b> Damp Location Available in powder coat or Satin Aluminum finish.  <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
<b>GL-4311</b>	<b>IN1.</b> 1MED  120 volt only			

All dimensions are nominal.

### Light Source Definition

Code	LED	Kelvin	Rated Life Hrs	Delivered Lumens
11LED30	11W LED	3000	50000	1075
11LED35	11W LED	3500	50000	1075
11LED40	11W LED	4000	50000	1075

Universal Voltage unless otherwise specified.