

DEMI

Exterior Surface Mount



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.

LED Dimming: Standard 1% 0-10V dimming.



Listing: ETL listed for wet locations.

Driver: Integral in fixture body.

Acrylic: Acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat. Inner finish matches outer fixture finish.

Surge Protection: External surge protector provided as standard.

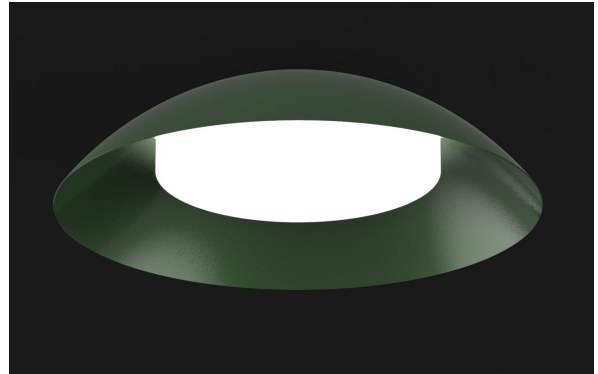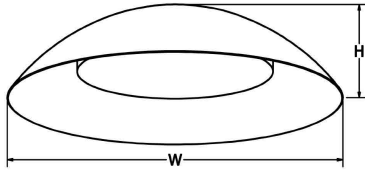

SAMPLE CATALOG NUMBER:

GL-9360-

MODEL NO.	E-	BLK-	A
	LAMPING	FINISH	OPTIONS
GL-9360 10lbs W in 24" 4.5kg H in 6"	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30 E. 1LED35 F. 1LED40 G. 1LED30 H. 1LED35 I. 1LED40	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-9361 10lbs W in 30" 4.5kg H in 7 7/16"			
GL-9362 15lbs W in 48" 7kg H in 12"			

All Dimensions are nominal.

Light Source Definition

Code	LED	Downlight Output		Kelvin	CRI
		Total Wattage	Delivered Lumens		
A	1LED30	15W	1695	3000	80
B	1LED35	15W	1695	3500	80
C	1LED40	15W	1695	4000	80
D	1LED30	26W	2906	3000	80
E	1LED35	26W	2906	3500	80
F	1LED40	26W	2906	4000	80
G	1LED30	39W	4359	3000	80
H	1LED35	39W	4359	3500	80
I	1LED40	39W	4359	4000	80

Universal Voltage unless otherwise specified.
Fixture tested with white finish. Non-white finishes will reduce lumen output.

