

STONE

Exterior Surface Mount





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** Standard 1% 0-10V dimming.
- Listing:** ETL listed for wet locations.
- Driver:** Integral in fixture body.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat. Inner finish matches outer fixture finish.
- Surge Protection:** External surge protector provided as standard.

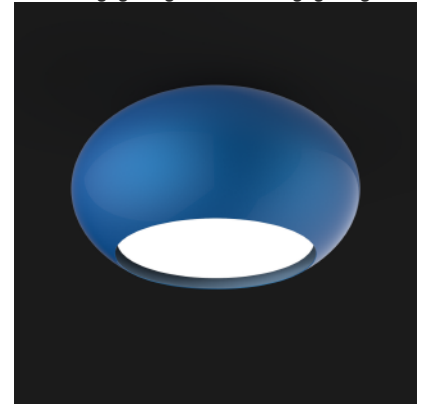

SAMPLE CATALOG NUMBER: GL-9370-			
MODEL NO.	E-	BLK-	A
	LAMPING	FINISH	OPTIONS
GL-9370 W 21 in 8lbs B 11 1/4 in 3.6kg	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30 E. 1LED35 F. 1LED40 G. 1LED30 H. 1LED35 I. 1LED40	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All Dimensions are nominal.

Light Source Definition

Downlight Output					
Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
A	1LED30	15W	1538	3000	80
B	1LED35	15W	1538	3500	80
C	1LED40	15W	1538	4000	80
D	1LED30	26W	2637	3000	80
E	1LED35	26W	2637	3500	80
F	1LED40	26W	2637	4000	80
G	1LED30	39W	3956	3000	80
H	1LED35	39W	3956	3500	80
I	1LED40	39W	3956	4000	80

Universal Voltage unless otherwise specified.
Fixture tested with white finish. Non-white finishes will reduce lumen output.

