

DOVER

Interior Surface Mount





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency 90 CRI mid-power LEDs. Universal voltage.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.
- Acrylic:** High diffusion and consistent light transmission.
- Driver:** Must be remotely mounted within 25ft from fixture body.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for modified fixture sizes and lumen packages.
- Surge Protection:** External surge protector provided as standard.

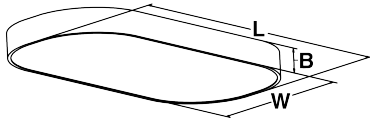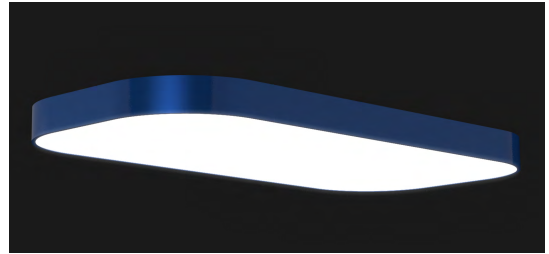

SAMPLE CATALOG NUMBER: GL-3942-		B-	BLK-	A
MODEL NO.		LAMPING	FINISH	OPTIONS
GL-3940	W in 18"x36" 5lbs B in 3" 3.2kg	A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3941	W in 24"x48" 7lbs B in 3" 3.2kg			
GL-3942	W in 30"x60" 10lbs B in 3" 4.5kg			

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Fixture	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Fixture	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
GL-3940	56	+90	50000	4775	3000/3500/4000	GL-3940	33	+90	50000	2865	3000/3500/4000
GL-3941	106	+90	50000	9005	3000/3500/4000	GL-3941	63	+90	50000	5403	3000/3500/4000
GL-3942	173	+90	50000	14362	3000/3500/4000	GL-3942	103	+90	50000	8617	3000/3500/4000

Universal Voltage unless otherwise specified.