

DEMI

Interior Pendant




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- Uplight:** Optional uplight is wired on a second circuit. Standard satin white top lens.
- LED Dimming:** Standard 1% 0-10V dimming.
- Cable Hanger Option:** Standard 150" cable and white cord for on-site adjustability.
- Canopy:** Matches outer fixture finish. Hanger 3 & 4 with A-O lamping option includes 10.125" dia by 2.625" H spinning. V, W, X lamping includes 12" dia by 2" H.
- Driver:** Max remote driver installation distance 25ft from fixture body.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Inner Finish:** Available in white, black, and gold liquid paint.
- Non-white inner finishes will reduce lumen output.
- Surge Protection:** External surge protector provided standard.

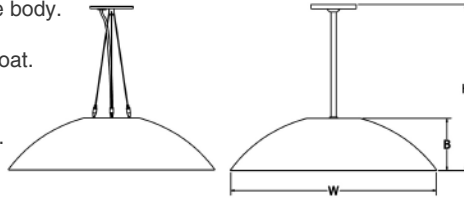

SAMPLE CATALOG NUMBER:

GL-2360- E- K- BLK- MO- 1- A 038

MODEL NO.	LAMPING	UPLIGHT	OUTER FINISH	INNER FINISH	HANGER	OPTIONS	OVERALL HEIGHT
GL-2360 10lbs W 24" in 4.5kg B 6" in H 38" in	A. 15LED30 B. 15LED35 C. 15LED40 D. 26LED30 E. 26LED35 F. 26LED40 G. 39LED30 H. 39LED35 I. 39LED40	NA. NONE J. 8UPLD30 K. 8UPLD35 L. 8UPLD40 M. 12UPLD30 N. 12UPLD35 O. 12UPLD40	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	Standard: MO- Matches Outer Finish Liquid Paint WH- White BLK- Black GL- Gold	1. Stem Mount Remote Driver Drivers mounted remotely 2. Cable Mount Remote Driver Drivers mounted remotely 3. Stem Mount Oversized Canopy Drivers mounted inside oversized canopy 4. Cable Mount Oversized Canopy Drivers mounted inside oversized canopy	A. No Options BC. Black Cord Fixture supplied with black power cord. DM. DMX Dimming EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. Downlight only.	Specify overall height in inches for hanger styles 1 & 3.
GL-2361 10lbs W 30" in 4.5kg B 7 7/16" in H 40" in	V. 68LED30* W. 68LED35* X. 68LED40*						
GL-2362 15lbs W 48" in 7kg B 12" in H 44" in							
	*Downlight only.		Outer finish designated by first finish code.	Inner finish designated by second finish code.		Hanger options 1&2 supplied with remote driver box.	

All Dimensions are nominal.

Light Source Definition

Downlight Output						Uplight Output					
Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI	Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
A	15LED30	15W	1695	3000	80	J	8UPLD30	8W	866	3000	80
B	15LED35	15W	1695	3500	80	K	8UPLD35	8W	866	3500	80
C	15LED40	15W	1695	4000	80	L	8UPLD40	8W	866	4000	80
D	26LED30	26W	2906	3000	80	M	12UPLD30	12W	1213	3000	80
E	26LED35	26W	2906	3500	80	N	12UPLD35	12W	1213	3500	80
F	26LED40	26W	2906	4000	80	O	12UPLD40	12W	1213	4000	80
G	39LED30	39W	4359	3000	80						
H	39LED35	39W	4359	3500	80						
I	39LED40	39W	4359	4000	80						
V	68LED30	68W	6617*	3000	80						
W	68LED35	68W	6617*	3500	80						
X	68LED40	68W	6617*	4000	80						

Universal Voltage unless otherwise specified.

*Projected

Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.

