

DEMI

Exterior Surface Mount



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.

LED Dimming: Standard 1% 0-10V dimming.



Listing: ETL listed for wet locations.

Driver: Integral in fixture body.

Acrylic: Acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat. Inner finish matches outer fixture finish.

Surge Protection: External surge protector provided as standard.

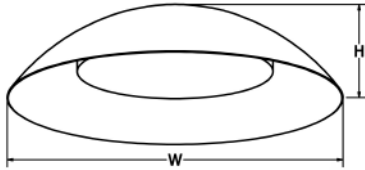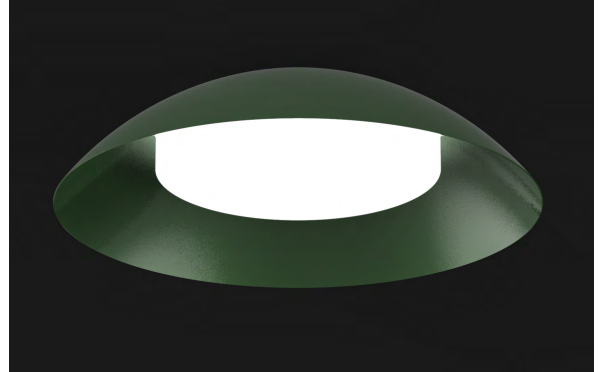

SAMPLE CATALOG NUMBER:

GL-9360-

MODEL NO.	E- LAMPING	BLK- FINISH	A OPTIONS
GL-9360 10lbs W in 24" 4.5kg H in 6"	A. 15LED30 B. 15LED35 C. 15LED40 D. 26LED30 E. 26LED35 F. 26LED40 G. 39LED30 H. 39LED35 I. 39LED40	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-9361 10lbs W in 30" 4.5kg H in 7 7/16"			
GL-9362 15lbs W in 48" 7kg H in 12"			

All Dimensions are nominal.

Light Source Definition

Code	LED	Downlight Output		Kelvin	CRI
		Total Wattage	Delivered Lumens		
A	15LED30	15W	1695	3000	80
B	15LED35	15W	1695	3500	80
C	15LED40	15W	1695	4000	80
D	26LED30	26W	2906	3000	80
E	26LED35	26W	2906	3500	80
F	26LED40	26W	2906	4000	80
G	39LED30	39W	4359	3000	80
H	39LED35	39W	4359	3500	80
I	39LED40	39W	4359	4000	80

Universal Voltage unless otherwise specified.
Fixture tested with white finish. Non-white finishes will reduce lumen output.