

DEMI

Interior Surface Mount





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Integral in fixture body. Remote driver required for V,W,X lamping options.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Inner Finish:** Inner finish available in white, black, and gold liquid paint. Non-white inner finishes will reduce lumen output.
- Surge Protection:** External surge protector provided as standard.

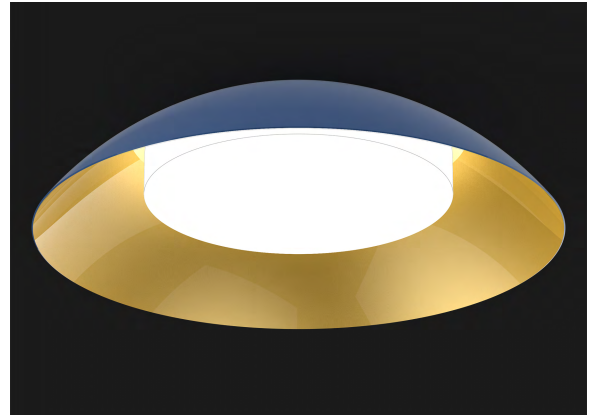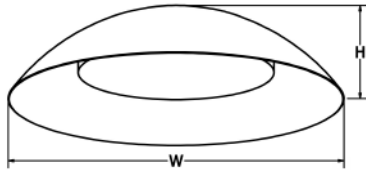

SAMPLE CATALOG NUMBER:

GL-3360-

MODEL NO.	E-	BLK-	MO-	A
	LAMPING	OUTER FINISH	INNER FINISH	OPTIONS
GL-3360 10lbs W in 24" 4.5kg H in 6"	A. 15LED30 B. 15LED35 C. 15LED40 D. 26LED30 E. 26LED35 F. 26LED40	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue	Standard: MO-Matches Outer Finish Liquid Paint WH- White BLK- Black GL- Gold	A. No Options DM. DMX Dimming Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3361 10lbs W in 30" 4.5kg H in 7 7/16"	G. 39LED30 H. 39LED35 I. 39LED40 V. 68LED30* W. 68LED35* X. 68LED40*	Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone		
GL-3362 15lbs W in 48" 7kg H in 12"				
	*Remote Driver only.	Outer finish designated by first finish code.	Inner finish designated by second finish code.	

All Dimensions are nominal.

Light Source Definition

Code	LED	Downlight Output		Kelvin	CRI
		Total Wattage	Delivered Lumens		
A	15LED30	15W	1695	3000	80
B	15LED35	15W	1695	3500	80
C	15LED40	15W	1695	4000	80
D	26LED30	26W	2906	3000	80
E	26LED35	26W	2906	3500	80
F	26LED40	26W	2906	4000	80
G	39LED30	39W	4359	3000	80
H	39LED35	39W	4359	3500	80
I	39LED40	39W	4359	4000	80
V	68LED30	68W	6617*	3000	80
W	68LED35	68W	6617*	3500	80
X	68LED40	68W	6617*	4000	80

*Projected

Universal Voltage unless otherwise specified.
Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.

