

# ODYSSEY

## Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs.

**Uplight:** Optional uplight is wired on a second circuit. Standard satin white top lens.

**LED Dimming:** Standard 1% 0-10V dimming.

**Cable Hanger Option:** Standard 150" cable and white cord for on-site adjustability.

**Canopy:** Matches outer fixture finish. Hanger 3 & 4 with A-O lamping option includes 10.125" dia by 2.625" H spinning. V, W, X lamping includes 12" dia by 2" H.


**Driver:** Max remote driver installation distance 25ft from fixture body.

**Acrylic:** Acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Inner Finish:** Inner finish matches outer finish.

**Surge Protection:** External surge protector provided as standard.

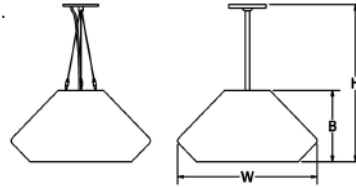

### SAMPLE CATALOG NUMBER:

MODEL NO.	LAMPING	UPLIGHT	FINISH	HANGER	OPTIONS	OVERALL HEIGHT
GL-2380- W 19 5/8 in 8lbs B 10 in 3.6kg H 38 in	A. 15LED30 B. 15LED35 C. 15LED40 D. 26LED30 E. 26LED35 F. 26LED40 G. 39LED30 H. 39LED35 I. 39LED40 V. 68LED30* W. 68LED35* X. 68LED40*	NA. NONE J. 8UPLD30 K. 8UPLD35 L. 8UPLD40 M. 12UPLD30 N. 12UPLD35 O. 12UPLD40	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	<b>1. Stem Mount Remote Driver</b>  Drivers mounted remotely <b>2. Cable Mount Remote Driver</b>  Drivers mounted remotely <b>3. Stem Mount Oversized Canopy</b>  Drivers mounted inside oversized canopy <b>4. Cable Mount Oversized Canopy</b>  Drivers mounted inside oversized canopy	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. <b>DM. DMX Dimming</b> <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. Downlight only.	Specify overall height in inches for hanger styles 1 & 3.
	*Downlight only.				Hanger options 1&2 supplied with remote driver box.	

All Dimensions are nominal.

### Light Source Definition

Downlight Output						Uplight Output					
Code	LED	Wattage	Delivered Lumens	Kelvin	CRI	Code	LED	Wattage	Delivered Lumens	Kelvin	CRI
A	15LED30	15W	1538	3000	80	J	8UPLD30	8W	866	3000	80
B	15LED35	15W	1538	3500	80	K	8UPLD35	8W	866	3500	80
C	15LED40	15W	1538	4000	80	L	8UPLD40	8W	866	4000	80
D	26LED30	26W	2637	3000	80	M	12UPLD30	12W	1213	3000	80
E	26LED35	26W	2637	3500	80	N	12UPLD35	12W	1213	3500	80
F	26LED40	26W	2637	4000	80	O	12UPLD40	12W	1213	4000	80
G	39LED30	39W	3956	3000	80						
H	39LED35	39W	3956	3500	80						
I	39LED40	39W	3956	4000	80						
V	68LED30	68W	6009*	3000	80						
W	68LED35	68W	6009*	3500	80						
X	68LED40	68W	6009*	4000	80						

\*Projected

Universal Voltage unless otherwise specified. Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.

