

# DAYTONA

## Interior Surface Mount




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency 90 CRI mid-power LEDs. Universal voltage.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.
- Direct to Ceiling Mount:** Ceiling mounting plate location is within the fixture body and not seen in final installation.
- Junction Box Mount:** Ceiling mounting plate extends .125" from the fixture body with a round 5" junction box cover.
- LED Driver:** Must be remotely mounted within 25ft from fixture body.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for modified fixture sizes and lumen packages.
- Surge Protection:** External surge protector provided as standard.

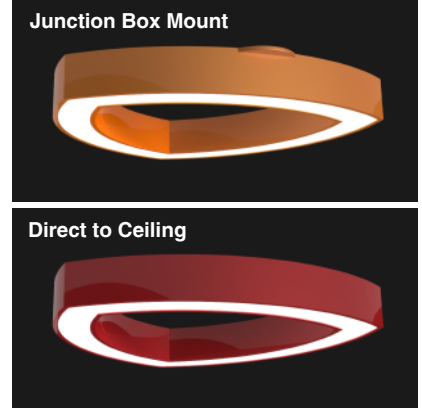

SAMPLE CATALOG NUMBER: GL-3955-		B-	BLK-	1-	A
MODEL NO.	LAMPING	FINISH	MOUNTING	OPTIONS	
<b>GL-3955</b> W in 24" 5lbs B in 3" 3.2kg	Down: <b>A.</b> LED30 <b>B.</b> LED35 <b>C.</b> LED40 <b>D.</b> LED30LO <b>E.</b> LED35LO <b>F.</b> LED40LO	Standard: Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>1. Direct to Ceiling</b>  Drivers mounted remotely  <b>2. Junction Box Mount</b>  Drivers mounted remotely. (1) 5in junction box cover plate.	<b>A.</b> No Options  <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	
<b>GL-3956</b> W in 30" 10lbs B in 3" 4.5kg					
<b>GL-3957</b> W in 36" 14lbs B in 3" 6.3kg					

All Dimensions are nominal.

### Light Source Definition

Fixture	High Lumen Output					Code	Low Lumen Output				
	Total Wattage	Rated CRI	Rated Life Hrs	Delivered Lumens	Kelvin		Total Wattage	Rated CRI	Rated Life Hrs	Delivered Lumens	Kelvin
GL-3955	45	+90	50000	4281	3000/3500/4000	GL-3955	24	+90	50000	2355	3000/3500/4000
GL-3956	64	+90	50000	6092	3000/3500/4000	GL-3956	35	+90	50000	3351	3000/3500/4000
GL-3957	84	+90	50000	7903	3000/3500/4000	GL-3957	46	+90	50000	4347	3000/3500/4000

Universal Voltage unless otherwise specified.

