

# RACETRACK

## Interior Surface Mount

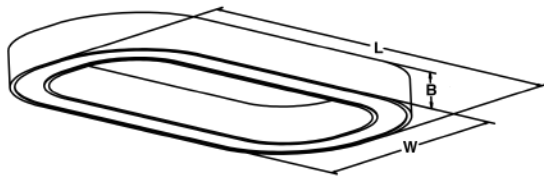




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency 90 CRI mid-power LEDs. Universal voltage.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.
- Direct to Ceiling Mount:** Ceiling mounting plate location is within the fixture body and not seen in final installation.
- Junction Box Mount:** Ceiling mounting plate extends .125" from the fixture body with a round 5" junction box cover.
- LED Driver:** Must be remotely mounted within 25ft from fixture body.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for modified fixture sizes and lumen packages.
- Surge Protection:** External surge protector provided as standard.



SAMPLE CATALOG NUMBER:					
GL-3947-		B-	RD-	1-	A
MODEL NO.		LAMPING	FINISH	MOUNTING	OPTIONS
<b>GL-3945</b>	L in 36" 5lbs W in 18" 3.2kg B in 3"	<b>A.</b> LED30 <b>B.</b> LED35 <b>C.</b> LED40 <b>D.</b> LED30LO <b>E.</b> LED35LO <b>F.</b> LED40LO	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>1. Direct to Ceiling</b>  Drivers mounted remotely <b>2. Junction Box Mount</b>  Drivers mounted remotely. (1) 5in junction box cover plate.	<b>A.</b> No Options  <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-3946</b>	L in 48" 7lbs W in 24" 3.2kg B in 3"				
<b>GL-3947</b>	L in 60" 10lbs W in 30" 4.5kg B in 3"				

All Dimensions are nominal.

### Light Source Definition

High Lumen Output						Low Lumen Output					
Fixture	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Fixture	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
GL-3945	45	+90	50000	4333	3000/3500/4000	GL-3945	24	+90	50000	2355	3000/3500/4000
GL-3946	64	+90	50000	6092	3000/3500/4000	GL-3946	35	+90	50000	3351	3000/3500/4000
GL-3947	84	+90	50000	7903	3000/3500/4000	GL-3947	46	+90	50000	4347	3000/3500/4000

Universal Voltage unless otherwise specified.