

TAHOE RGB+WHITE

Interior Square Semi-Surface Mount



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

RGB: LED option features RGB color changing light source. RGB channel wired DMX ready.

Static Color: LED options (Red, Green, or Blue) feature static color.


Shade: Standard fabric shade with removable white acrylic diffuser. Custom shapes, sizes, and colors available.

Finish: Highly durable oven cured no VOC premium powder coat.

DMX: Controls by others.

Surge Protection: External surge protector provided as standard.

Standard textured white finish




SAMPLE CATALOG NUMBER: GL-3757-				HH-	W-	A
MODEL NO.				LAMPING	SHADE	OPTIONS
GL-3757	W in 24"	mm 610		DD. RED	HH. RGB30*	W White
	D in 11.5"	mm 295		EE. GREEN	II. RGB35*	C Cream
GL-3758	W in 30"	mm 760		FF. BLUE	JJ. RGB40*	BL Blue
	D in 12.5"	mm 320		GG. RGB*		BK Black
GL-3759	W in 36"	mm 915		KK. RED	OO. RGB30*	S Stone
	D in 13.5"	mm 340		LL. GREEN	PP. RGB35*	R Red
GL-3760	W in 48"	mm 1220		MM. BLUE	QQ. RGB40*	
	D in 15.5"	mm 395		NN. RGB*		
				RR. RED	VV. RGB30*	Washable:
				SS. GREEN	WW. RGB35*	WW White
				TT. BLUE	XX. RGB40*	WC Cream
				UU. RGB*		WLG Lt Gray
				YY. RED	AD. RGB30*	WGR Gray
				ZZ. GREEN	AE. RGB35*	WBK Black
				AB. BLUE	AF. RGB40*	WR Red
				AC. RGB*		WBL Blue
				Shade options may vary based on availability. Consult Finish Guide at glighting.com for current options.		

All Dimensions are nominal.


*DMX controls supplied by others.

Shade

Standard

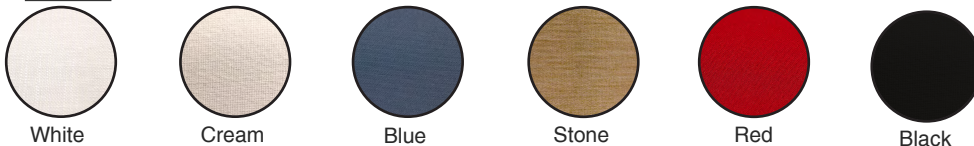

Washable - Trilam

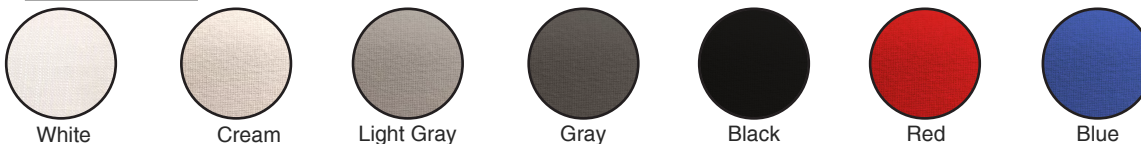

Custom fabrics available upon request. Contact factory. Reproduced graphic representation. Please contact sales@glighting.com for fabric samples.

Light Source Definition

Fixture	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens
GL-3742	72	+80	50000	7436
GL-3743	72	+80	50000	7436
GL-3744	114	+80	50000	12248
GL-3745	114	+80	50000	12248

Universal Voltage unless otherwise specified.