

TAHOE

Interior Square Semi-Surface Mount



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

Lower Output: Lamping code ending with LO features lower lumen output.


LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Shade: Standard fabric shade with removable white acrylic diffuser. Custom shapes, sizes, and colors available.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping or cluster options.


Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:				L55-			W-		A	
GL-3757-				LAMPING			SHADE		OPTIONS	
MODEL NO.										
GL-3755	W in 14"	mm 355	5lbs 2.25kg	IN3. 3MED	L10. 1LED30	LL10. 1LED30LO	W White	C Cream	BL Blue	BK Black
	D in 9.5"	mm 240			L15. 1LED35	LL15. 1LED35LO				
GL-3756	W in 18"	mm 460	5lbs 2.25kg	IN3. 3MED	L14. 1LED40	LL14. 1LED40LO	S Stone	R Red	Washable:	WW White
	D in 9.5"	mm 265			L10. 1LED30	LL10. 1LED30LO				
GL-3757	W in 24"	mm 610	15lbs 7kg	IN3. 3MED	L15. 1LED35	LL15. 1LED35LO	WC Cream	WLG Lt Gray	WGR Gray	WBK Black
	D in 11.5"	mm 295			L50. 5LED30	LL50. 5LED30LO				
GL-3758	W in 30"	mm 760	18lbs 8kg	IN3. 3MED	L54. 5LED40	LL54. 5LED40LO	WR Red	WBL Blue	Shade options may vary based on availability. Consult Finish Guide at lighting.com for current options.	
	D in 12.5"	mm 320			L55. 5LED35	LL55. 5LED35LO				
GL-3759	W in 36"	mm 915	20lbs 9kg	IN6. 6MED	L80. 8LED30	LL80. 8LED30LO				
	D in 13.5"	mm 340			L85. 8LED35	LL85. 8LED35LO				
GL-3760	W in 48"	mm 1220	25lbs 11.5kg	IN6. 6MED	L84. 8LED40	LL84. 8LED40LO				
	D in 15.5"	mm 395								

All Dimensions are nominal.

Shade

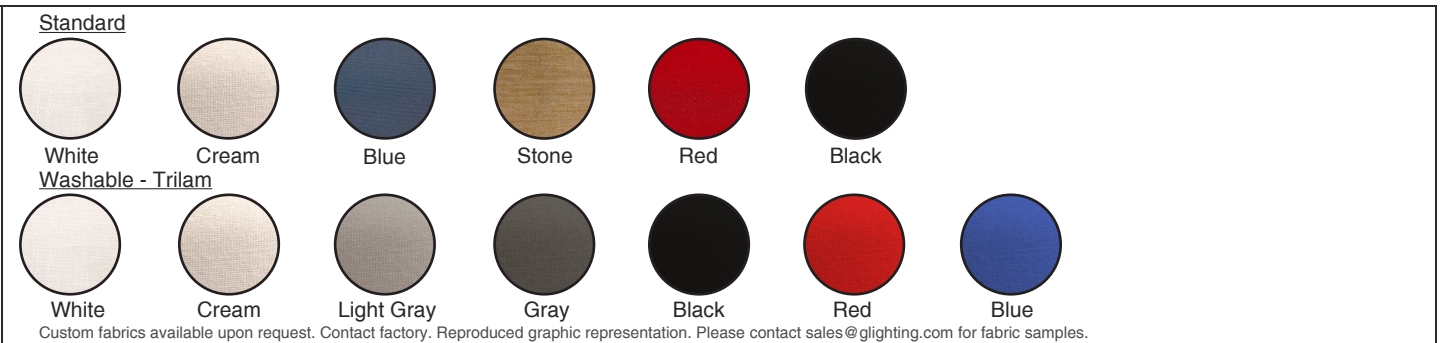

Custom fabrics available upon request. Contact factory. Reproduced graphic representation. Please contact sales@lighting.com for fabric samples.

Light Source Definition

Code	Lamp	Type	Lamp Base	Code	Lamp	Total Wattage	Delivered Lumens	Kelvin	CRI
IN3,IN6	MED	A-19	Medium 120V	LL50	5LED30LO	39W	4462	3000	+90
				LL55	5LED35LO	39W	4462	3500	+90
				LL54	5LED40LO	39W	4462	4000	+90
				L50	5LED30	65W	7436	3000	+90
				L55	5LED35	65W	7436	3500	+90
				L54	5LED40	65W	7436	4000	+90
				LL80	8LED30LO	63W	7126	3000	+90
				LL85	8LED35LO	63W	7126	3500	+90
				LL84	8LED40LO	63W	7126	4000	+90
				L80	8LED30	105W	12248	3000	+90
				L85	8LED35	105W	12248	3500	+90
				L84	8LED40	105W	12248	4000	+90

Universal Voltage unless otherwise specified.

Contact factory for availability of other lamp configurations.