DEMI

Interior Pendant

G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.
Uplight: Optional uplight is wired on a second circuit. Standard satin white top lens.
LED Dimming: Standard 1% 0-10V dimming.
Cable Hanger Option: Standard 150" cable and white cord for on-site adjustability.
Canopy: Matches outer fixture finish. Hanger 3 & 4 with A-O lamping option includes 10.125" dia by 2.625" H spinning. V, W, X lamping includes 12" dia by 2" H.
Driver: Max remote driver installation distance 25ft from fixture body.
Acrylic: Acrylic is UL-94 HB Flame Class rated.
Finish: Highly durable oven cured no VOC premium powder coat.
Inner Finish: Available in white, black, and gold liquid paint. Non-white inner finishes will reduce lumen output.
Surge Protection: External surge protector provided standard.

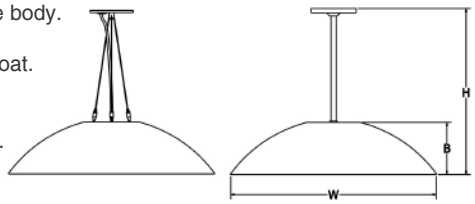

SAMPLE CATALOG NUMBER:

GL-2360-	E-	K-	BLK-	MO-	1-	A	038
MODEL NO.	LAMPING	UPLIGHT	OUTER FINISH	INNER FINISH	HANGER	OPTIONS	OVERALL HEIGHT
GL-2360 10lbs W 24" in 4.5kg B 6" in H 38" in **GL-2361** 10lbs W 30" in 4.5kg B 7 7/16" in H 40" in **GL-2362** 15lbs W 48" in 7kg B 12" in H 44" in	**A.** 15LED30 **B.** 15LED35 **C.** 15LED40 **D.** 26LED30 **E.** 26LED35 **F.** 26LED40 **G.** 39LED30 **H.** 39LED35 **I.** 39LED40 **V.** 68LED30* **W.** 68LED35* **X.** 68LED40* ***Downlight only.**	**NA.** NONE **J.** 8UPLED30 **K.** 8UPLED35 **L.** 8UPLED40 **M.** 12UPLED30 **N.** 12UPLED35 **O.** 12UPLED40	Standard: Powder Coat **BLK**-Black **BL**-Blue **GR**-Gray **LG**-Light Gray **BE**-Beige **PAB**-Antique Brass **PA**-Painted Aluminum **PTC**-Painted Copper **WH**-White **DBZ**-Dark Bronze **NSN**-New Satin Nickel **BRN**-Brown **RD**-Red **CH**-Champagne **RG**-Reed Green **SG**-Sungold **GM**-Gun Metal **POR**-Oil Rubbed Bronze **PG**-Pine Green **DO**-Deep Orange **PV**-Purple Violet **NB**-Navy Blue Textured Powder **TLV**-Light Verdigris **TWH**-Textured White **TBL**-Textured Black **TS**-Textured Silver **TBZ**-Textured Bronze **TST**-Stone **Outer finish designated by first finish code.**	Standard: **MO**-Matches Outer Finish Liquid Paint **WH**-White **BLK**-Black **GL**-Gold **SL**-Silver **CP**-Copper **Inner finish designated by second finish code.**	**1.** Stem Mount Remote Driver Drivers mounted remotely **2.** Cable Mount Remote Driver Drivers mounted remotely **3.** Stem Mount Oversized Canopy Drivers mounted inside oversized canopy **4.** Cable Mount Oversized Canopy Drivers mounted inside oversized canopy	**A.** No Options **BC.** Black Cord Fixture supplied with black power cord. **DM.** DMX Dimming **EL.** Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. Downlight only. **Hanger options 1&2 supplied with remote driver box.**	Specify overal height in inches for hanger styles 1 & 3.

All Dimensions are nominal.

Light Source Definition

Downlight Output

Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
A	15LED30	15W	1695	3000	80
B	15LED35	15W	1695	3500	80
C	15LED40	15W	1695	4000	80
D	26LED30	26W	2906	3000	80
E	26LED35	26W	2906	3500	80
F	26LED40	26W	2906	4000	80
G	39LED30	39W	4359	3000	80
H	39LED35	39W	4359	3500	80
I	39LED40	39W	4359	4000	80
V	68LED30	68W	6617*	3000	80
W	68LED35	68W	6617*	3500	80
X	68LED40	68W	6617*	4000	80

*Projected

Uplight Output

Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
J	8UPLED30	8W	866	3000	80
K	8UPLED35	8W	866	3500	80
L	8UPLED40	8W	866	4000	80
M	12UPLED30	12W	1213	3000	80
N	12UPLED35	12W	1213	3500	80
O	12UPLED40	12W	1213	4000	80

Universal Voltage unless otherwise specified.

Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function

G Lighting products are union made.