
BEAM RGB+W

Exterior Sconce


G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED lamping options (RGB30, RGB35, & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.
RGB: LED lamping option features RGB color changing. DMX controller supplied by others. Static Color: LED options (Red, Green, or Blue) feature static color.
LED: High efficiency mid-power LEDs are field serviceable.
LED Dimming: Standard 0-10V dimming when static color specified.
LED Driver: Driver remotely mounted up to 10' from fixture body.
Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.
Standard Finishes: Highly durable oven cured no VOC premium powder coat.
Design: Aluminum die cast end caps and decorative bars.
Modified: Contact factory for modified lengths, lamping and decorative fronts.
Exterior Mounting: Gasketed between wall and wall plate.
Listing: Fixture ETL listed for wet locations.



Design Options

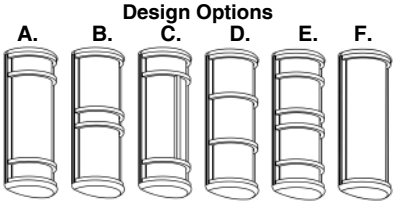

SAMPLE CATALOG NUMBER: GL-5451- H- S- PA- A- A

MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-5450 W in 7 1/4" mm 185 H in 17" mm 430 5lbs D in 3 7/8" mm 125 2.3kg	**Y.** RED **Z.** GREEN **AA.** BLUE **BB.** RGB **CC.** 14RGB30 **DD.** 14RGB35 **EE.** 14RGB40	Standard: **S.** Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat **BLK**-Black **BL**-Blue **GR**-Gray **LG**-Light Gray **BE**-Beige **PAB**-Antique Brass **PA**-Painted Aluminum **PTC**-Painted Copper **WH**-White **DBZ**-Dark Bronze **NSN**-New Satin Nickel **BRN**-Brown **RD**-Red **CH**-Champagne **RG**-Reed Green **SG**-Sungold **GM**-Gun Metal **POR**-Oil Rubbed Bronze **PG**-Pine Green **DO**-Deep Orange **PV**-Purple Violet **NB**-Navy Blue Textured Powder **TLV**-Light Verdigris **TWH**-Textured White **TBL**-Textured Black **TS**-Textured Silver **TBZ**-Textured Bronze **TST**-Stone	Standard: **A.** Optional: **B.** **C.** **D.** **E.** Not available with GL-5450 **F.**	**A.** No Options **EL.** Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-5451 W in 7 1/4" mm 185 H in 25" mm 635 7lbs D in 3 7/8" mm 125 3.2kg	**FF.** RED **GG.** GREEN **HH.** BLUE **II.** RGB **JJ.** 14RGB30 **KK.** 14RGB35 **LL.** 14RGB40 **MM.** 28RGB30 **NN.** 28RGB35 **OO.** 28RGB40				
GL-5452 W in 7 1/4" mm 185 H in 37" mm 940 10lbs D in 3 7/8" mm 125 4.5kg	**PP.** RED **QQ.** GREEN **RR.** BLUE **SS.** RGB **TT.** 21RGB30 **UU.** 21RGB35 **VV.** 21RGB40 **WW.** 42RGB30 **XX.** 42RGB35 **YY.** 42RGB40				
GL-5453 W in 7 1/4" mm 185 H in 49" mm 1245 14lbs D in 3 7/8" mm 125 6.3kg	**ZZ.** RED **AB.** GREEN **AC.** BLUE **AD.** RGB **AE.** 28RGB30 **AF.** 28RGB35 **AG.** 28RGB40 **AH.** 56RGB30 **AI.** 56RGB35 **AJ.** 56RGB40				

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14W	+80	50000	1244	3000
14RGB35	14W	+80	50000	1244	3500
14RGB40	14W	+80	50000	1244	4000
21RGB30	21W	+80	50000	1745	3000
21RGB35	21W	+80	50000	1745	3500
21RGB40	21W	+80	50000	1745	4000

Universal Voltage unless otherwise specified.

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
28RGB30	28W	+80	50000	2409	3000
28RGB35	28W	+80	50000	2409	3500
28RGB40	28W	+80	50000	2409	4000
42RGB30	42W	+80	50000	3591	3000
42RGB35	42W	+80	50000	3591	3500
42RGB40	42W	+80	50000	3591	4000
56RGB30	56W	+80	50000	4870	3000
56RGB35	56W	+80	50000	4870	3500
56RGB40	56W	+80	50000	4870	4000

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function

G Lighting products are custom made.