
# BEAM with LED SPOT

## Exterior Sconce

G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED Up/Down Light:** Non-dimming 3.6W 225 lumen LED spot.
**LED Reflector:** 40° and 60° reflectors available.
**LED:** High efficiency +90CRI mid-power LEDs are field serviceable.
**LED Dimming:** 0-10V dimming standard.
**Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
**Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.
**Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
**Design:** Aluminum die cast end caps and decorative bars.
**Modified:** Contact factory for modified lengths, lamping and decorative fronts.
**Exterior Mounting:** Gasketed between wall and wall plate.
**Listing:** Fixture ETL listed for wet locations.

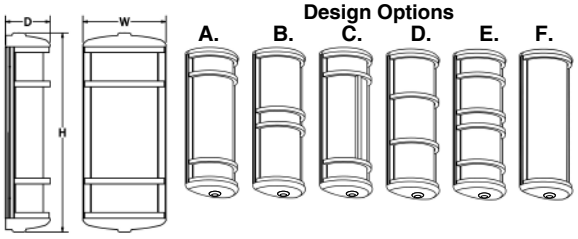


SAMPLE CATALOG NUMBER:

| GL-5461- | G- | C- | S- | PA- | A- | A |
|---|---|---|---|---|---|---|
| MODEL NO. | LAMPING | DIRECTION | DIFFUSER | FINISH | DESIGN | OPTION(S) |
| **GL-5460** W in 7 1/4" H in 17 1/2" D in 3 7/8" 5lbs 2.3kg | **A.** 13LED30<br>**C.** 13LED40 | **A.** 40° Uplight & No Downlight<br>**B.** 60° Uplight & No Downlight<br>**C.** 40° Downlight & No Uplight<br>**D.** 60° Downlight & No Uplight<br>**E.** 40° Up & Down<br>**F.** 60° Up & Down<br>**G.** 40° Up 60° Down<br>**H.** 60° Up 40° Down | Standard:<br>**S.** Satin White<br>Polycarbonate is UL-94 HB Flame Class rated. | Standard:<br>Powder Coat<br>**BLK**-Black<br>**BL**-Blue<br>**GR**-Gray<br>**LG**-Light Gray<br>**BE**-Beige<br>**PAB**-Antique Brass<br>**PA**-Painted Aluminum<br>**PTC**-Painted Copper<br>**WH**-White<br>**DBZ**-Dark Bronze<br>**NSN**-New Satin Nickel<br>**BRN**-Brown<br>**RD**-Red<br>**CH**-Champagne<br>**RG**-Reed Green<br>**SG**-Sungold<br>**GM**-Gun Metal<br>**POR**-Oil Rubbed Bronze<br>**PG**-Pine Green<br>**DO**-Deep Orange<br>**PV**-Purple Violet<br>**NB**-Navy Blue<br>Textured Powder<br>**TLV**-Light Verdigris<br>**TWH**-Textured White<br>**TBL**-Textured Black<br>**TS**-Textured Silver<br>**TBZ**-Textured Bronze<br>**TST**-Stone | Standard:<br>**A.**<br>Optional:<br>**B.**<br>**C.**<br>**D.**<br>**E.** Not available with GL-5460<br>**F.** | **A.** No Options<br>**EL.** Emergency LED<br>Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. |
| **GL-5461** W in 7 1/4" H in 27 1/2" D in 3 7/8" 7lbs 3.2kg | **D.** 13LED30<br>**F.** 13LED40<br>**G.** 26LED30<br>**I.** 26LED40 | | | | | |
| **GL-5462** W in 7 1/4" H in 39 1/2" D in 3 7/8" 10lbs 4.5kg | **K.** 20LED30<br>**M.** 20LED40<br>**N.** 39LED30<br>**P.** 39LED40 | | | | | |
| **GL-5463** W in 7 1/4" H in 51 1/2" D in 3 7/8" 14lbs 6.3kg | **R.** 26LED30<br>**T.** 26LED40<br>**U.** 52LED30<br>**W.** 52LED40 | | | | | |

All dimensions are nominal.

### Light Source Definition

| Code | LED | CRI | Delivered Lumens | Kelvin |
|---|---|---|---|---|
| 13LED30 | 13W | +90 | 1244 | 3000 |
| 13LED40 | 13W | +90 | 1244 | 4000 |
| 20LED30 | 20W | +90 | 1745 | 3000 |
| 20LED40 | 20W | +90 | 1745 | 4000 |
| 26LED30 | 26W | +90 | 2409 | 3000 |
| 26LED40 | 26W | +90 | 2409 | 4000 |
| 39LED30 | 39W | +90 | 3591 | 3000 |
| 39LED40 | 39W | +90 | 3591 | 4000 |
| 52LED30 | 52W | +90 | 4870 | 3000 |
| 52LED40 | 52W | +90 | 4870 | 4000 |

| Spot LED | Reflector | CRI | Lumens | Kelvin |
|---|---|---|---|---|
| 3.6W | 40° | 80 | 225 | 3000 & 4000 |
| 3.6W | 60° | 80 | 225 | 3000 & 4000 |

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function