
SQUARE BEAM with LED SPOT

Exterior Sconce

G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED Up/Down Light: Non-dimming 3.6W 225 lumen LED spot.
LED Reflector: 40° and 60° reflectors available.
LED: High efficiency +90CRI mid-power LEDs are field serviceable.
LED Dimming: 0-10V dimming standard.
Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.
Standard Finishes: Highly durable oven cured no VOC premium powder coat.
Design: Aluminum die cast end caps and decorative bars.
Modified: Contact factory for modified lengths, lamping and decorative fronts.
Exterior Mounting: Gasketed between wall and wall plate.
Listing: Fixture ETL listed for wet locations.

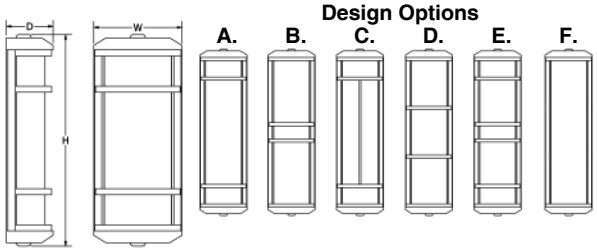

SAMPLE CATALOG NUMBER: GL-5481- G- C- S- PA- A- A

MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-5480 W 7 1/4" in H 17 1/2" in D 3 7/8" in 5lbs 2.3kg	**A.** 13LED30 **C.** 13LED40	**A.** 40° Uplight & No Downlight **B.** 60° Uplight & No Downlight **C.** 40° Downlight & No Uplight **D.** 60° Downlight & No Uplight **E.** 40° Up & Down **F.** 60° Up & Down **G.** 40° Up 60° Down **H.** 60° Up 40° Down	Standard: **S.** Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat **BLK**-Black **BL**-Blue **GR**-Gray **LG**-Light Gray **BE**-Beige **PAB**-Antique Brass **PA**-Painted Aluminum **PTC**-Painted Copper **WH**-White **DBZ**-Dark Bronze **NSN**-New Satin Nickel **BRN**-Brown **RD**-Red **CH**-Champagne **RG**-Reed Green **SG**-Sungold **GM**-Gun Metal **POR**-Oil Rubbed Bronze **PG**-Pine Green **DO**-Deep Orange **PV**-Purple Violet **NB**-Navy Blue Textured Powder **TLV**-Light Verdigris **TWH**-Textured White **TBL**-Textured Black **TS**-Textured Silver **TBZ**-Textured Bronze **TST**-Stone	Standard: **A.** Optional: **B.** **C.** **D.** **E.** Not available with GL-5480 **F.**	**A.** No Options **EL.** Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-5481 W 7 1/4" in H 27 1/2" in D 3 7/8" in 7lbs 3.2kg	**D.** 13LED30 **F.** 13LED40 **G.** 26LED30 **I.** 26LED40					
GL-5482 W 7 1/4" in H 39 1/2" in D 3 7/8" in 10lbs 4.5kg	**K.** 20LED30 **M.** 20LED40 **N.** 39LED30 **P.** 39LED40					
GL-5483 W 7 1/4" in H 51 1/2" in D 3 7/8" in 14lbs 6.3kg	**R.** 26LED30 **T.** 26LED40 **U.** 52LED30 **W.** 52LED40					

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
13LED30	13W	+90	50000	1333	3000
13LED40	13W	+90	50000	1333	4000
20LED30	20W	+90	50000	2095	3000
20LED40	20W	+90	50000	2095	4000
26LED30	26W	+90	50000	2690	3000
26LED40	26W	+90	50000	2690	4000
39LED30	39W	+90	50000	4191	3000
39LED40	39W	+90	50000	4191	4000
52LED30	52W	+90	50000	5764	3000
52LED40	52W	+90	50000	5764	4000

Spot LED	Reflector	CRI	Lumens	Kelvin
3.6W	40°	80	225	3000 & 4000
3.6W	60°	80	225	3000 & 4000

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function