
SQUARE BEAM with LED SPOT

Exterior Sconce - RGBW


G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED Up/Down Light: Non-dimming static white 3.6W 225 lumen LED spot.
LED Reflector: 40° and 60° reflectors available.
RGB+White: LED lamping options (RGB30 & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.
RGB: LED lamping option features RGB color changing. DMX controller supplied by others. Static Color: LED options (Red, Green, or Blue) feature static color.
LED: High efficiency mid-power LEDs are field serviceable.
LED Dimming: Standard 0-10V dimming when static color specified.
LED Driver: Driver remotely mounted up to 10' from fixture body.
Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.
Standard Finishes: Highly durable oven cured no VOC premium powder coat.
Design: Aluminum die cast end caps and decorative bars.
Exterior Mounting: Gasketed between wall and wall plate.
Listing: Fixture ETL listed for wet locations.



Design Options

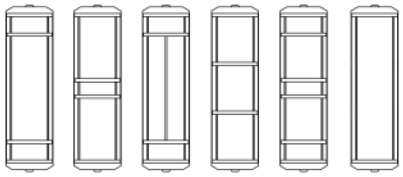

SAMPLE CATALOG NUMBER:

GL-5481-	G-	C-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-5480 W 7 1/4" in H 17 1/2" in 5lbs D 3 7/8" in 2.3kg	**Y.** RED **Z.** GREEN **AA.** BLUE **BB.** RGB **CC.** 14RGB30 **EE.** 14RGB40	**A.** 40° Uplight & No Downlight **B.** 60° Uplight & No Downlight **C.** 40° Downlight & No Uplight **D.** 60° Downlight & No Uplight **E.** 40° Up & Down **F.** 60° Up & Down **G.** 40° Up 60° Down **H.** 60° Up 40° Down	Standard: **S.** Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat **BLK**-Black **BL**-Blue **GR**-Gray **LG**-Light Gray **BE**-Beige **PAB**-Antique Brass **PA**-Painted Aluminum **PTC**-Painted Copper **WH**-White **DBZ**-Dark Bronze **NSN**-New Satin Nickel **BRN**-Brown **RD**-Red **CH**-Champagne **RG**-Reed Green **SG**-Sungold **GM**-Gun Metal **POR**-Oil Rubbed Bronze **PG**-Pine Green **DO**-Deep Orange **PV**-Purple Violet **NB**-Navy Blue Textured Powder **TLV**-Light Verdigris **TWH**-Textured White **TBL**-Textured Black **TS**-Textured Silver **TBZ**-Textured Bronze **TST**-Stone	Standard: **A.** Optional: **B.** **C.** **D.** **E.** Not available with GL-5480 **F.**	**A.** No Options **EL.** Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-5481 W 7 1/4" in H 27 1/2" in 7lbs D 3 7/8" in 3.2kg	**FF.** RED **GG.** GREEN **HH.** BLUE **II.** RGB **JJ.** 14RGB30 **LL.** 14RGB40 **MM.** 28RGB30 **OO.** 28RGB40					
GL-5482 W 7 1/4" in H 39 1/2" in 10lbs D 3 7/8" in 4.5kg	**PP.** RED **QQ.** GREEN **RR.** BLUE **SS.** RGB **TT.** 21RGB30 **VV.** 21RGB40 **WW.** 42RGB30 **YY.** 42RGB40					
GL-5483 W 7 1/4" in H 51 1/2" in 14lbs D 3 7/8" in 6.3kg	**ZZ.** RED **AB.** GREEN **AC.** BLUE **AD.** RGB **AE.** 28RGB30 **AG.** 28RGB40 **AH.** 56RGB30 **AJ.** 56RGB40					

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14W	+80	50000	781	3000
14RGB40	14W	+80	50000	781	4000
21RGB30	21W	+80	50000	1171	3000
21RGB40	21W	+80	50000	1171	4000
28RGB30	28W	+80	50000	1562	3000
28RGB40	28W	+80	50000	1562	4000
42RGB30	42W	+80	50000	2527	3000
42RGB40	42W	+80	50000	2527	4000
56RGB30	56W	+80	50000	3124	3000
56RGB40	56W	+80	50000	3124	4000

Spot LED	Reflector	CRI	Lumens	Kelvin
3.6W	40°	80	225	3000 & 4000
3.6W	60°	80	225	3000 & 4000

Universal Voltage unless otherwise specified.

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function

G Lighting products are custom made.