
SQUARE BEAM with LED SPOT

ADA Interior Sconce

G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED Up/Down Light: Non-dimming 3.6W 225 lumen LED spot.
LED Reflector: 40° and 60° reflectors available.
LED: High efficiency +90CRI mid-power LEDs are field serviceable.
LED Dimming: 0-10V dimming standard.
Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.
Standard Finishes: Highly durable oven cured no VOC premium powder coat.
Design: Aluminum die cast end caps and decorative bars.
Modified: Contact factory for modified lengths, lamping and decorative fronts.

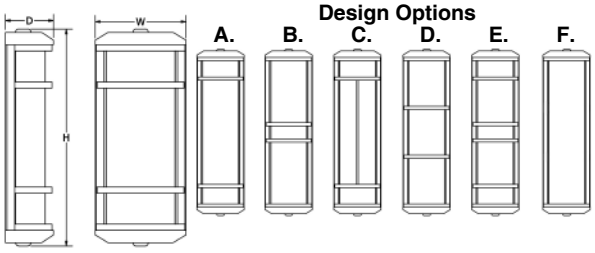

SAMPLE CATALOG NUMBER:

GL-4481-	G-	C-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)

GL-4480 W in 7 1/4" H in 17 1/2" D in 3 7/8" 5lbs 2.3kg

GL-4481 W in 7 1/4" H in 27 1/2" D in 3 7/8" 7lbs 3.2kg

GL-4482 W in 7 1/4" H in 39 1/2" D in 3 7/8" 10lbs 4.5kg

GL-4483 W in 7 1/4" H in 51 1/2" D in 3 7/8" 14lbs 6.3kg

LAMPING
- **A.** 13LED30
- **C.** 13LED40
- **D.** 13LED30
- **F.** 13LED40
- **G.** 26LED30
- **I.** 26LED40
- **K.** 20LED30
- **M.** 20LED40
- **N.** 39LED30
- **P.** 39LED40
- **R.** 26LED30
- **T.** 26LED40
- **U.** 52LED30
- **W.** 52LED40

DIRECTION
- **A.** 40° Uplight & No Downlight
- **B.** 60° Uplight & No Downlight
- **C.** 40° Downlight & No Uplight
- **D.** 60° Downlight & No Uplight
- **E.** 40° Up & Down
- **F.** 60° Up & Down
- **G.** 40° Up 60° Down
- **H.** 60° Up 40° Down

DIFFUSER
Standard:
S. Satin White
Polycarbonate is UL-94 HB Flame Class rated.

FINISH
Standard:
Powder Coat
BLK-Black
BL-Blue
GR-Gray
LG-Light Gray
BE-Beige
PAB-Antique Brass
PA-Painted Aluminum
PTC-Painted Copper
WH-White
DBZ-Dark Bronze
NSN-New Satin Nickel
BRN-Brown
RD-Red
CH-Champagne
RG-Reed Green
SG-Sungold
GM-Gun Metal
POR-Oil Rubbed Bronze
PG-Pine Green
DO-Deep Orange
PV-Purple Violet
NB-Navy Blue
Textured Powder
TLV-Light Verdigris
TWH-Textured White
TBL-Textured Black
TS-Textured Silver
TBZ-Textured Bronze
TST-Stone

DESIGN
Standard:
A.
Optional:
B.
C.
D.
E. Not available with GL-4480
F.

OPTION(S)
A. No Options
EL. Emergency LED
Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
13LED30	13W	+90	50000	1333	3000
13LED40	13W	+90	50000	1333	4000
20LED30	20W	+90	50000	2095	3000
20LED40	20W	+90	50000	2095	4000
26LED30	26W	+90	50000	2690	3000
26LED40	26W	+90	50000	2690	4000
39LED30	39W	+90	50000	4191	3000
39LED40	39W	+90	50000	4191	4000
52LED30	52W	+90	50000	5764	3000
52LED40	52W	+90	50000	5764	4000

Spot LED	Reflector	CRI	Lumens	Kelvin
3.6W	40°	80	225	3000 & 4000
3.6W	60°	80	225	3000 & 4000

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

© Gross Chandelier Co.
G Lighting reserves the right to modify existing designs to improve appearance or function
G Lighting products are uniform in ads.