SQUARE BEAM TUNABLE WHITE

ADA Interior Sconce

G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Dimming: Intensity adjustable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Driver: Driver remotely mounted up to 10' from fixture body.


Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

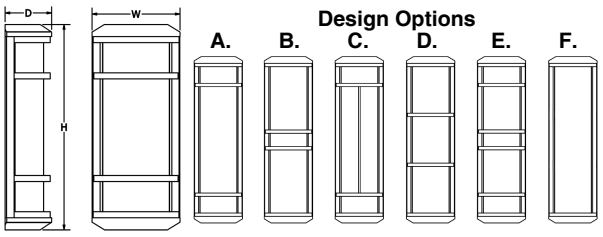

SAMPLE CATALOG NUMBER: GL-4471- 28TW- S- PA- A- A

MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-4470 W in 7 1/4" mm 185 H in 17" mm 430 D in 3 7/8" mm 125 5lbs 2.3kg	**14TW**	Standard: **S.** Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat **BLK**-Black **BL**-Blue **GR**-Gray **LG**-Light Gray **BE**-Beige **PAB**-Antique Brass **PA**-Painted Aluminum **PTC**-Painted Copper **WH**-White **DBZ**-Dark Bronze **NSN**-New Satin Nickel **BRN**-Brown **RD**-Red **CH**-Champagne **RG**-Reed Green **SG**-Sungold **GM**-Gun Metal **POR**-Oil Rubbed Bronze **PG**-Pine Green **DO**-Deep Orange **PV**-Purple Violet **NB**-Navy Blue Textured Powder **TLV**-Light Verdigris **TWH**-Textured White **TBL**-Textured Black **TS**-Textured Silver **TBZ**-Textured Bronze **TST**-Stone	Standard: **A.** Optional: **B.** **C.** **D.** **E.** Not available with GL-4470 **F.**	**A.** No Options **EL.** Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-4471 W in 7 1/4" mm 185 H in 25" mm 635 D in 3 7/8" mm 125 7lbs 3.2kg	**14TW** **28TW**				
GL-4472 W in 7 1/4" mm 185 H in 37" mm 940 D in 3 7/8" mm 125 10lbs 4.5kg	**21TW** **42TW**				
GL-4473 W in 7 1/4" mm 185 H in 49" mm 1245 D in 3 7/8" mm 125 14lbs 6.3kg	**28TW** **56TW**				

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
14TW	14W	1333	2700-6500
21TW	21W	2095	2700-6500
28TW	28W	2690	2700-6500
42TW	42W	4191	2700-6500
56TW	56W	5764	2700-6500

Universal Voltage unless otherwise specified.

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function

G Lighting products are union made.