

BROOKLYN

Interior Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency high-power LEDs. Universal 120-277V input voltage.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Driver: Max remote driver installation distance: 25ft from fixture body.

Body: Seamless acrylic cylinder is UL-94 HB Flame Class rated. Cast aluminum body.

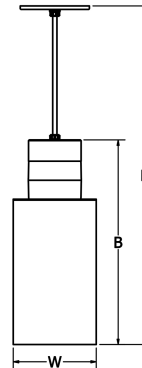
Cord Hanger Option: Standard 72" white cord for on-site adjustability.





Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available with stem or field adjustable cord.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for modified lumen packages.

Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:						
GL-6577-		B-	W-	NSN-	1-	A- 024
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-6577 Win 6" B in 14 7/8" 7lbs H in 22" 3.2kg	A. 1LED30 B. 1LED35 C. 1LED40	Standard: W White Opal S Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone Premium: SA -Satin Aluminum	1. Stem Mount Remote Driver  Driver mounted remotely. 2. Cord  Driver mounted remotely. 3. Stem Mount Oversized Canopy  12" Canopy 4. Cord Mount Oversized Canopy  Standard white power cord. 12" Canopy.	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. BC. Black Cord Fixture supplied with black power cord. LC. 150" Cord Fixture supplied with 150" of standard white cord or optional black cord.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.
GL-6578 Win 6" B in 28 1/2" 8lbs H in 36" 3.6kg						

All dimensions are nominal

Light Source Definition

Code	Total Wattage	Delivered Lumens*	Kelvin
A	17W	1450	3000K
B	17W	1450	3500K
C	17W	1450	4000K

Universal Voltage unless otherwise specified. *Pending IES testing