

ORBIS II - Acoustic

Outer Acrylic Interior Surface Mount





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- Acoustic Panel:** 1/2" center acoustic panel reduces noise level in environment.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Max remote driver installation distance: White LED 25ft from fixture body and RGB 45ft from fixture body.
- RGB:** DMX controller supplied by others.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Mounting Plate:** Matches fixture finish.
- Surge Protection:** External surge protector provided as standard.

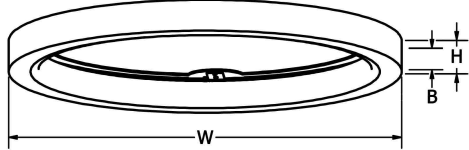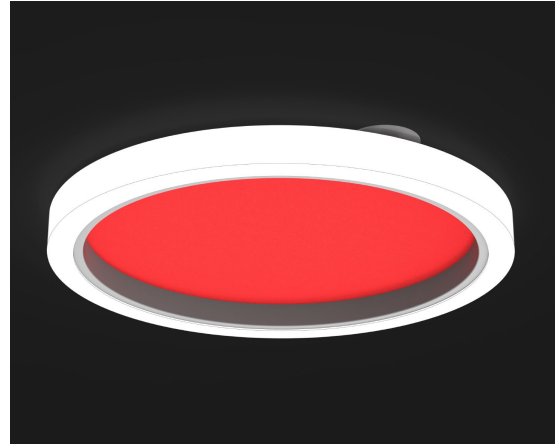

SAMPLE CATALOG NUMBER:				
GL-3797-	F-	BLK-	ABLK-	A
MODEL NO.	LAMPING	FINISH	ACOUSTIC	OPTIONS
GL-3795 W 24" 10lbs B 3" 4.5kg H 3.5"	A. 24LED30 AL. 24LED30LO B. 24LED35 BL. 24LED35LO C. 24LED40 CL. 24LED40LO D. RGB	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	Standard: Acoustic ABLK -Black ABL -Blue AGR -Gray ALG -Light Gray ARD -Red AGN -Green	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3796 W 36" 12lbs B 3" 5.4kg H 3.5"	U. 36LED30 UL. 36LED30LO V. 36LED35 VL. 36LED35LO W. 36LED40 WL. 36LED40LO X. RGB			
GL-3797 W 48" 15lbs B 3" 6.8kg H 3.5"	E. 48LED30 EL. 48LED30LO F. 48LED35 FL. 48LED35LO G. 48LED40 GL. 48LED40LO H. RGB			

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	Rated CRI	Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	Rated CRI	Life Hrs	Delivered Lumens*	Kelvin
24LED30/35/40	56	+80	50000	5141	3000/3500/4000	24LED30LO/35LO/40LO	34	+80	50000	3085	3000/3500/4000
36LED30/35/40	76	+80	50000	7480	3000/3500/4000	36LED30LO/35LO/40LO	46	+80	50000	4488	3000/3500/4000
48LED30/35/40	108	+80	50000	10197	3000/3500/4000	48LED30LO/35LO/40LO	65	+80	50000	6118	3000/3500/4000
RGB	Contact Factory for Details										

Universal Voltage unless otherwise specified. *Estimate