

# VECTOR

## Indoor Surface Mount





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency +90CRI mid-power LEDs are field serviceable.
- LED Dimming:** 1% 0-10V dimming standard with LED lamping option.
- Body:** Body formed with 18ga steel.
- Acrylic:** UL-94 HB Flame Class rated.
- Modifications:** Consult factory for lamping, cluster, or sizing options.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.

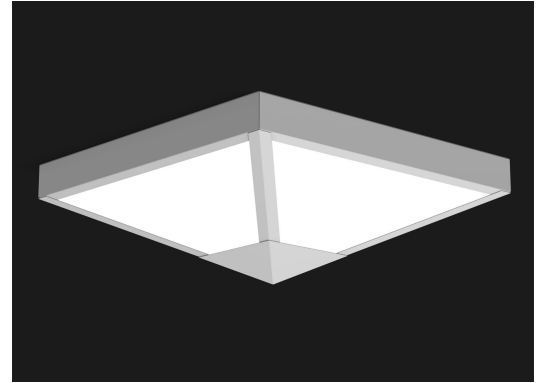

SAMPLE CATALOG NUMBER: GL-3632-		L85-	W-	NSN-	A-
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
<b>GL-3630</b> 21lbs W in 24" mm 610 10kg D in 9" mm 225	<b>L40.</b> 4LED30 <b>IN4.</b> 4MED <b>L45.</b> 4LED35 <b>L44.</b> 4LED40	<b>Standard:</b> W. White Opal  <b>Optional:</b> S. Satin White  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	<b>A.</b> No Options <b>B.</b> Damp Location Available in powder coat finish. <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
<b>GL-3631</b> 28lbs W in 30" mm 760 13kg D in 10 1/2" mm 265	<b>L80.</b> 8LED30 <b>IN4.</b> 4MED <b>L85.</b> 8LED35 <b>L84.</b> 8LED40				
<b>GL-3632</b> 37lbs W in 36" mm 915 17kg D in 12 1/8" mm 310	<b>L80.</b> 8LED30 <b>IN8.</b> 8MED <b>L85.</b> 8LED35 <b>L84.</b> 8LED40				
<b>GL-3633</b> 52lbs W in 46" mm 1170 24kg D in 14 3/4" mm 375	<b>L80.</b> 8LED30 <b>IN8.</b> 8MED <b>L85.</b> 8LED35 <b>L84.</b> 8LED40				

Fixtures over 50 lbs require reinforced junction box  
All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Kelvin	Board Lumens	Code	Lamp	Type	Lamp Base
L40	52	3000	7580	IN4, IN8	Med	A-19	Medium 120V
L45	52	3500	7580				
L44	52	4000	7580				
L80	105	3000	15160				
L85	105	3500	15160				
L84	105	4000	15160				

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.