

POMPEY

Indoor ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Body: Formed .050 aluminum body with 1/4" x 1/2" aluminum rails and 1/2"sq decorative bars.

Acrylic: Cylinder is UL-94 HB Flame Class rated. Top and bottom lens standard.



Standard Finishes: Highly durable oven cured no VOC premium powder coat.

LED: High efficiency +90CRI mid-power LEDs are field serviceable.

LED Dimming: 1% 0-10V dimming standard with LED lamping option.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

Surge Protection: External surge protector provided as standard.

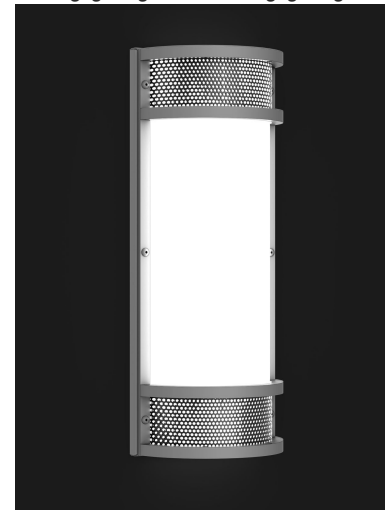

SAMPLE CATALOG NUMBER:				
GL-4420-	G-	W-	PA- BLK-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4420 W in 7 1/4" mm 185 H in 18" mm 460 5lbs 2.3kg D in 4" mm 100	F. 13LED30 G. 13LED35 H. 13LED40	Standard: W. White Opal Optional: S. Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone Perforated finish designated by second finish code.	A. No Options B. Damp Location EL. Emergency LED Consult factory. Must be remotely mounted in a controlled environment with an area temperature range of 32°- 131°F. F. LED Up Light 4000K Metal cap standard with option. Consult factory for dimming. G. LED Down Light 4000K Metal cap standard with option. Consult factory for dimming. H. LED Up Light 3000K Metal cap standard with option. Consult factory for dimming. I. LED Down Light 3000K Metal cap standard with option. Consult factory for dimming.

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
13LED30	13W	+90	50000	1192	3000
13LED35	13W	+90	50000	1192	3500
13LED40	13W	+90	50000	1192	4000
UP/DOWN	4W SPOT LIGHT	80	35000	260	3000 or 4000

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.